


Start Surface IP66 Ø350mm Sensor Dim

START SURFACE IP66 1450LM 830 MW SENS EM3 IK10 BLK
0049014

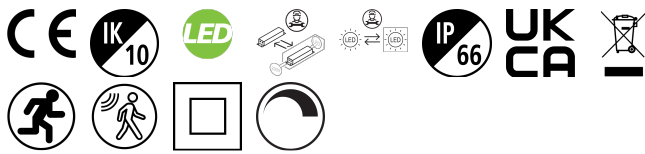


PRODUCT OVERVIEW

Product name	START SURFACE IP66 1450LM 830 MW SENS EM3 IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
Warranty	5 years
Fixture luminous flux (lm)	1450
Luminaire efficacy (lm/W)	85
LOR (%)	100
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Glare control	< 25
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	124
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490144

PHOTOMETRY

Start Surface IP66 Ø350mm Sensor Dim *START SURFACE IP66 1450LM 830 MW SENS EM3 IK10 BLK* 0049014

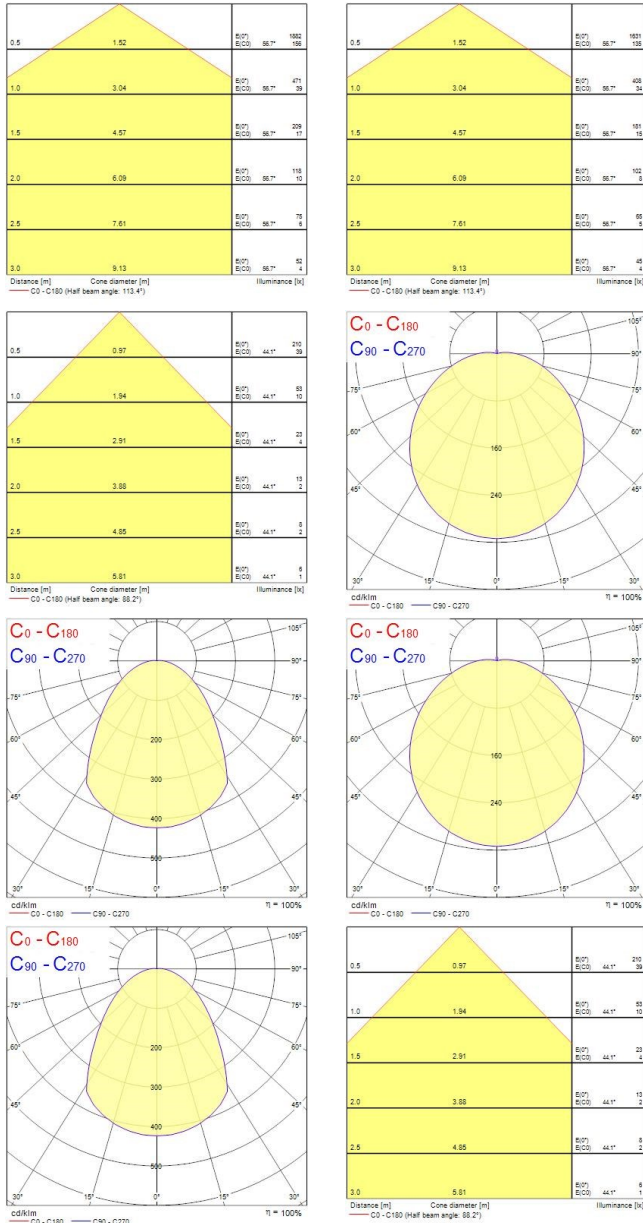

TECHNICAL DRAWINGS

