

Features

- A bright, all-around lighting solution for living rooms, wall lights, ceiling lights, compact and decorative luminaires Quick and easy replacement of compact fluorescent, halogen or incandescent lamp 15,000H average rated life 85% energy savings compared to incandescent Last 50% longer and consume 45% less energy compared to compact fluorescent integrated lamps Omni-directional light distribution Non-dimmable



Product Overview

Product name	ToLEDo Stick V4 500LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	5.0
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4740965
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Wattage (W)	5.0
Power consumption (W)	5
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288295596

ToLEDo Stick V4 500LM 840 E27 SL 0029559

Warranty	3 years
Useful luminous flux (#use)	500

Technical drawings

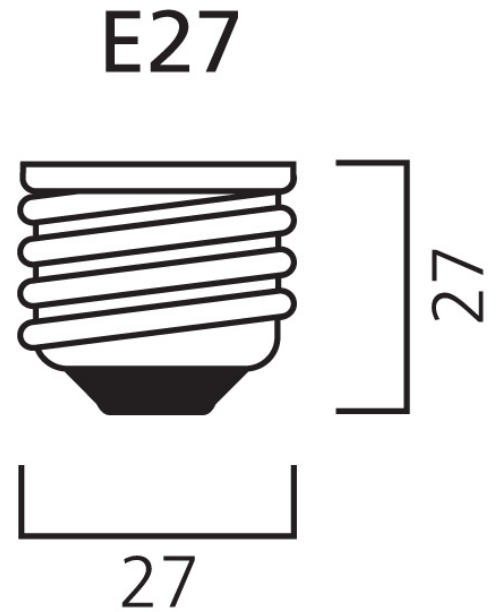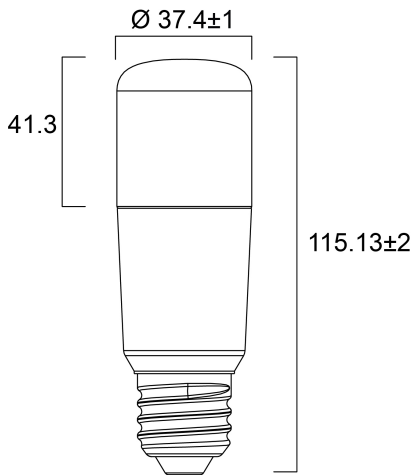

Data table

GENERAL DATA

Product name	ToLEDo Stick V4 500LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	5.0
Cap/Base	E27
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959

ToLEDo Stick V4 500LM 840 E27 SL 0029559

E-number FI	4740965
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	500
Luminous flux (Rated) (lm)	500
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Power consumption (W)	5
Wattage (W)	5.0
Equivalent watt (W)	40
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	1.8
Inrush Duration (μ s)	200
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	220
Max. products per 16A B Breaker	220

LIFETIME DATA

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000

ToLEDo Stick V4 500LM 840 E27 SL 0029559

Average life (Rated) (h)	15000
--------------------------	-------

PHYSICAL DATA

Nominal Product Height (mm)	115
Nominal Product Diameter (mm)	37
Weight (kg)	0.034

PACKAGING

Product EAN number	5410288295596
Packaging single length / height (cm)	5.0
Packaging single width (cm)	5.0
Packaging single depth (cm)	12.3
DUN14 (inner)	15410288295593
Units per outer package	6
Packaging outer length / height (cm)	15.4
Packaging outer width (cm)	10.3
Packaging outer depth (cm)	13.7

SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

SYLVANIA

ToLEDo Stick V4 500LM 840 E27 SL
0029559

Energy label



0029559



5
kWh/1000h



2019/2015



0029559



5
kWh/1000h



2019/2015