


## Equinox EQUINOX 165 2300 940 DALI BLACK 2060589

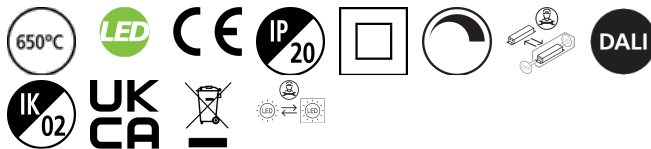


### PRODUCT OVERVIEW

Product name	EQUINOX 165 2300 940 DALI BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Warranty	5 years
Fixture luminous flux (lm)	2300
Luminaire efficacy (lm/W)	115
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Colour Consistency (SDCM)	3
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Remote
Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK02
Product EAN number	5025768605897


### PHOTOMETRY

## Equinox EQUINOX 165 2300 940 DALI BLACK 2060589

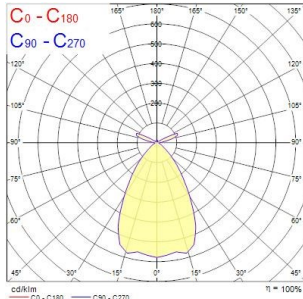

Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C0) [lx]	E(C90) [lx]
0.5	0.64	5071	5071	5071
1.0	1.28	1267	1267	1267
1.5	1.92	571	571	571
2.0	2.56	324	324	324
2.5	3.20	208	208	208
3.0	3.84	144	144	144

Distance [m] Cone diameter [m]  
C0 - C180 (Half beam angle: 65.2°)

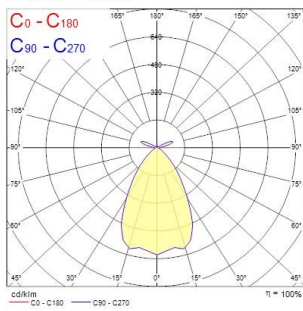

Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C0) [lx]	E(C90) [lx]
0.5	0.64	5023	5023	5023
1.0	1.28	1261	1261	1261
1.5	1.92	551	551	551
2.0	2.56	333	333	333
2.5	3.20	213	213	213
3.0	3.84	148	148	148

Distance [m] Cone diameter [m]  
C0 - C180 (Half beam angle: 65.8°)

### TECHNICAL DRAWINGS

