



Features

• Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured white finishing colour Light color temperature: 4000K, natural white System power: 14W, Fixture lumen output: 1700lm, efficacy: 121lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, DALI dimmable driver, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.60mmx130mm 5 years warranty


Product Overview

| | |
|----------------------------|---|
| Product name | PIXO SMALL 1700LM 940 NB MB WB DALI WHITE |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Aluminium |
| Mount | Track mounting |
| General application | Museums & Galleries, Retail, Office, Residential & Consumer |
| ETIM Class | EC001744 |
| E-number FI | 4279609 |
| Fixture luminous flux (lm) | 1700 |
| Luminaire efficacy (lm/W) | 121 |

PIXO SMALL 1700LM 940 NB MB WB DALI WHITE
0004558

| | |
|-----------------------------------|-----------------------------|
| Correlated colour temperature (k) | 4000 |
| Light colour | Warm White |
| CRI (Ra) | 90 |
| Colour Variation Initial (SDCM) | 4 |
| Beam Angle (°) | 36 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 14 |
| Electrical protection | Class II |
| Control gear type | LED driver constant current |
| Dimmable | Yes |
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK03 |
| Product EAN number | 5410288045580 |
| Warranty | 5 years |
| Dimming method | DALI-2 |
| Useful luminous flux (#use) | 1700 |

Photometry

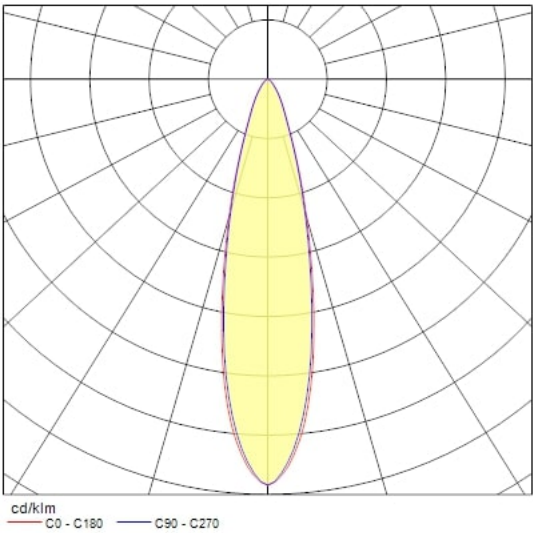

Technical drawings

