

28 508 710





- spray head Ø 92mm
- Three settings: COMPACT RAIN, COMPACT SOFT FLOW, COMPACT AQUAPRESSURE FLOW, max. flow rate 9 l/min (at 3 bar)
- Function from: 7 l/min
- with anti-scale system

Technical data:

- 200-mm projection
- ball-joint pivotable through 30°
- rosette 78 x 55 mm
- 1/2" connection

Notes:

	Brushed Platinum	28 508 710-06
	Chrome	28 508 710-00


Recommended miscellaneous



- Concealed wall elbow -** 35 085 970 90
- min. recess depth 90 mm
 - max. recess depth 163 mm

28 508 710


mm [inches]

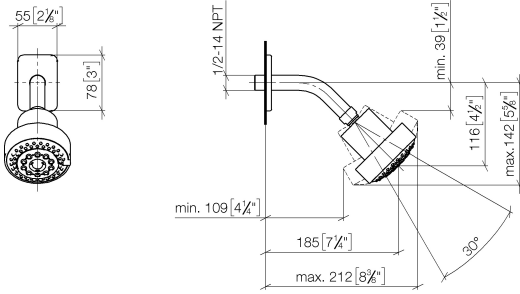

Flow rate chart



28 508 710

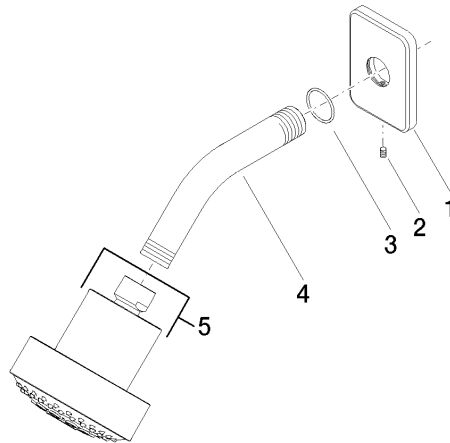

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	09 27 71 004-06	Rosette 78 x 55 x 8,5 mm - Brushed Platinum	1.00	20
5	04 12 11 110 00-06	Spray Overhead shower 93 x 113 x 100 mm - Brushed Platinum	1.00	20
2	09 31 11 048 90	Mounting Threaded pin with hexagon socket with point M4 x 8 mm -	1.00	14
4	09 11 03 011-06	Connection 140 x 65 x 21 mm - Brushed Platinum	1.00	20
3	09 14 10 098 90	O-Ring 22,0 x 1,6 mm -	1.00	14