



Features

- Sensor Dim LED exterior surface mounted luminaire, 350mm diameter, 2500lm as max. lumen output, can be adjusted down to 1750lm by internal switch, 25W max. power consumption, 100lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), whitehousing, vandal resistant. Integrated Microwave occupancy sensor with daylight harvest, dimming and corridor function, supplied with anti-theft screws

Product Overview

Product name	START SURFACE IP66 2500LM 840 MW SENS IK10 WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
E-number FI	4579496
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	100
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated

START SURFACE IP66 2500LM 840 MW SENS IK10 WHT 0049021

LED Flickering Rate Ultra low (5% or less)

Housing colour RAL9003

IP rating IP66


IK rating IK10

Product EAN number 5410288490212

Warranty 5 years

Colour Code 840

Photometry

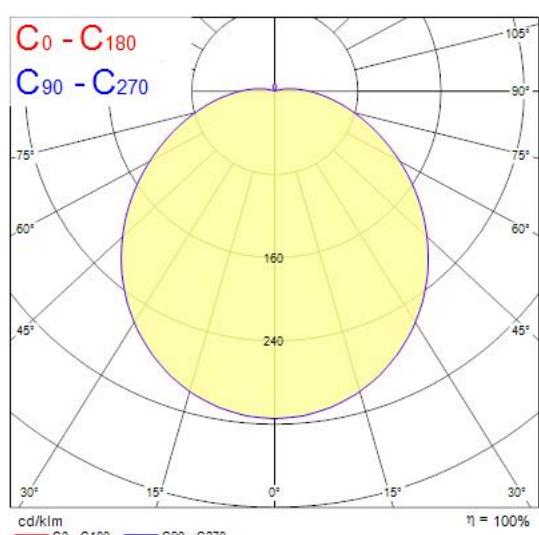

Technical drawings

