

Start Surface IP66 Ø350mm Sensor Dim
START SURFACE IP66 2400LM 830 MW SENS IK10 BLK
0049022




PRODUCT OVERVIEW

Product name	START SURFACE IP66 2400LM 830 MW SENS IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
E-number FI	4579497
Warranty	5 years
Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490229

PHOTOMETRY

Start Surface IP66 Ø350mm Sensor Dim START SURFACE IP66 2400LM 830 MW SENS IK10 BLK 0049022

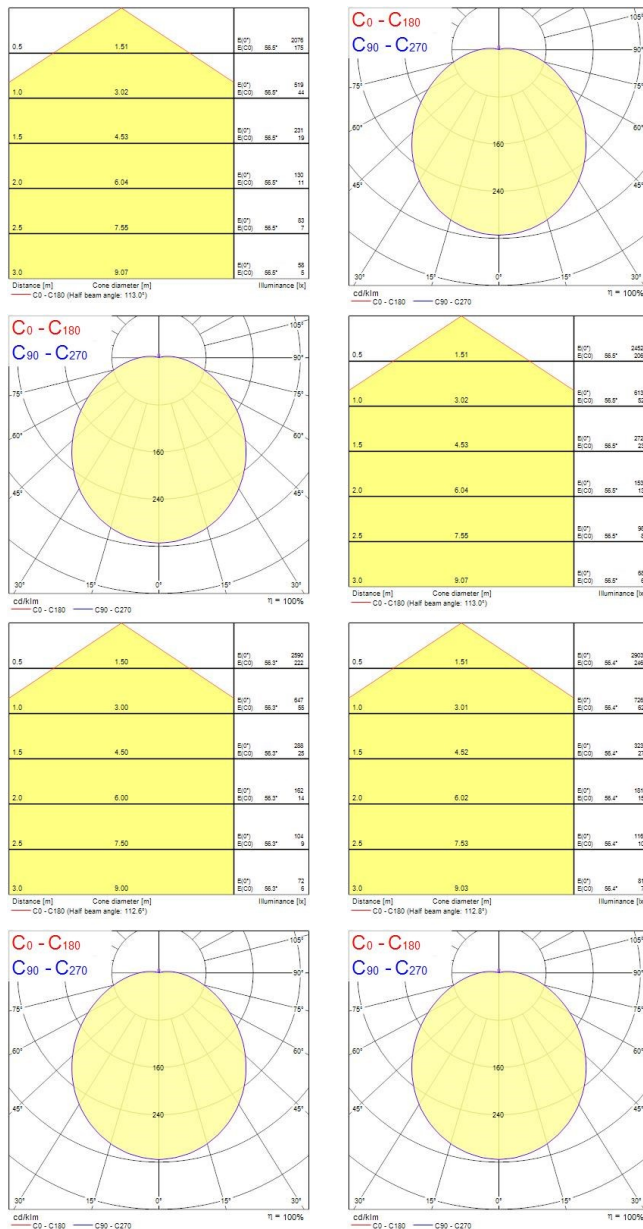

TECHNICAL DRAWINGS

