

START SURFACE IP66 2400LM 830 MW SENS IK10 BLK
0049022



Features

- Sensor Dim LED exterior surface mounted luminaire, 350mm diameter, 2400lm as max. lumen output, can be adjusted down to 1650lm by internal switch, 25W max. power consumption, 96lm/W efficacy, 3000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), black housing, vandal resistant. Integrated Microwave occupancy sensor with daylight harvest, dimming and corridor function, supplied with anti-theft screws


Product Overview

Product name	START SURFACE IP66 2400LM 830 MW SENS IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
E-number FI	4579497
Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)

START SURFACE IP66 2400LM 830 MW SENS IK10 BLK 0049022

Housing colour	RAL9011
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490229
Warranty	5 years
Colour Code	830

Photometry

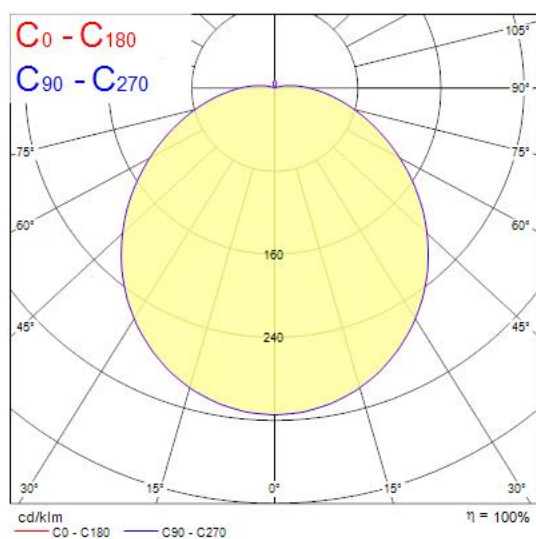

Technical drawings

