

Start Surface IP66 Ø350mm Sensor Dim
START SURFACE IP66 2500LM 840 MW SENS IK10 BLK
0049023




PRODUCT OVERVIEW

Product name	START SURFACE IP66 2500LM 840 MW SENS IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
E-number FI	4579498
Warranty	5 years
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	100
LOR (%)	100
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	25
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288490236

PHOTOMETRY

Start Surface IP66 Ø350mm Sensor Dim
START SURFACE IP66 2500LM 840 MW SENS IK10 BLK
0049023

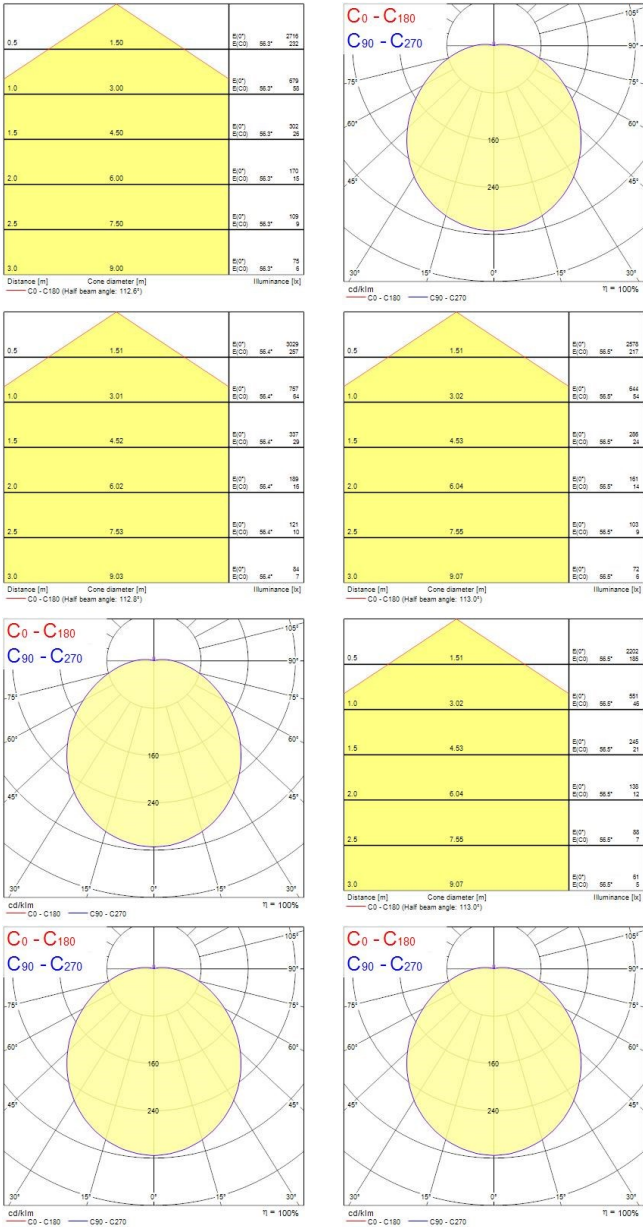

TECHNICAL DRAWINGS

