




Features

- Compact and elegant design
- Suitable replacement for halogen, incandescent and compact fluorescent GLS lamps
- Instant light at the flick of a switch
- Uniform light distribution
- Good colour rendering (CRI 80)
- Perfect for hotels, restaurants, lobbies, corridors, stairwells, reception areas
- Lower maintenance costs
- A+ energy rating

Product Overview

Product name	ToLEDo GLS V6 1521LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	14
Cap/Base	E27
Fixture rating	Open
E-number FI	4740567
Colour temperature (K)	4000
CRI (Ra)	80
Wattage (W)	14
Product EAN number	5410288279664
Warranty	3 years

Technical drawings

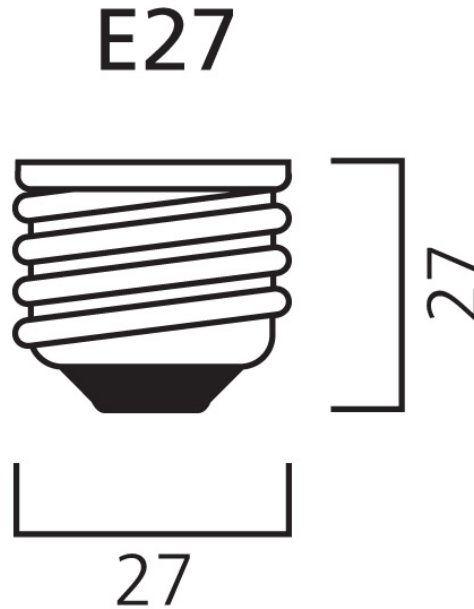

Data table

GENERAL DATA

Product name	ToLEDo GLS V6 1521LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	14
Cap/Base	E27
Fixture rating	Open
Performance ambient temperature Tq (°C)	25
E-number FI	4740567
Warranty	3 years

OPTICAL DATA

Luminous flux (Rated) (lm)	1521
Colour temperature (K)	4000

ToLEDo GLS V6 1521LM 840 E27 SL 0027966

CRI (Ra)	80
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Wattage (W)	14
Starting time (max) (s)	0.5
Lamp power factor	0.5
Control gear required	No
Inrush Current (A)	5.25
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	78

LIFETIME DATA

Average life (Rated) (h)	15000
--------------------------	-------

PHYSICAL DATA

Nominal Product Length (mm)	120
Nominal Product Diameter (mm)	60
Weight (kg)	0.056

PACKAGING

Single packaging type	Carton
Product EAN number	5410288279664
Packaging single width (cm)	6.4
Packaging single depth (cm)	6.4
DUN14 (inner)	25410288279668
Units per inner package	6
Packaging inner length / height (cm)	20.4
Packaging inner width (cm)	13.4
Packaging inner depth (cm)	13.7
DUN14 (outer)	15410288279661
Packaging outer length / height (cm)	72.4

SAFETY DATA

Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No
Safety message	Not Suitable for totally enclosed fixtures