



Features

- Round shaped in-ground luminaire with fixed light module, walk-over for pressure loads to 500kg (5kN), comes with 2m 3x1mm² flying lead and recessing tube, aluminium housing with Stainless steel (SS316) decorative ring and frosted glass diffuser, IP67, IK10, Class I, non-dimmable, 115lm, 3.5W, 33lm/W, CRI80, 100° beam angle, 50000 hrs L70 B50 lumen maintenance, 100mm diameter, 129mm recessing tube height, 0.42kg weight.

Product Overview


Product name	INTERRATA XS IP67 FROSTED 100LM 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ground recessed
E-number FI	4579499
Fixture luminous flux (lm)	115
Luminaire efficacy (lm/W)	33
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG0
Total power consumption (W)	3.5
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	Stainless steel
IP rating	IP67
IK rating	IK10
Product EAN number	5410288490366
Warranty	5 years

INTERRATA XS IP67 FROSTED 100LM 830 0049036

Colour Code

830

Photometry

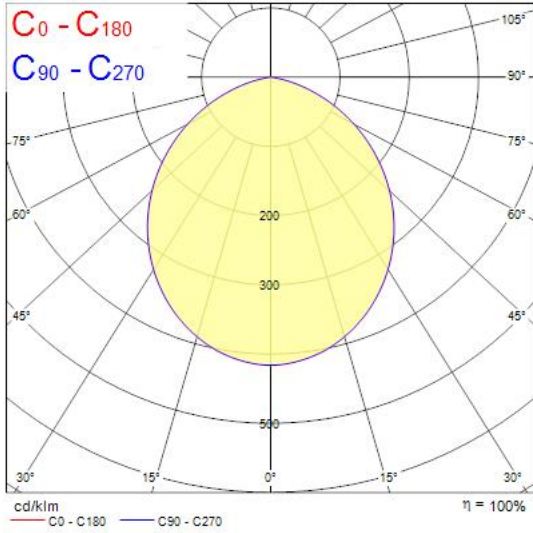

Technical drawings

