



Features

• Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured black finishing colour Light color temperature: 4000K, natural white System power: 14W, Fixture lumen output: 1700lm, efficacy: 121lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, DALI dimmable driver, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.60mmx130mm 5 years warranty


Product Overview

Product name	PIXO SMALL 1700LM 940 NB MB WB DALI BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries, Retail, Office, Residential & Consumer
ETIM Class	EC001744
E-number FI	4279611
Fixture luminous flux (lm)	1700
Luminaire efficacy (lm/W)	121

PIXO SMALL 1700LM 940 NB MB WB DALI BLACK  
0004559

Correlated colour temperature (k)	4000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	4
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	14
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK03
Product EAN number	5410288045597
Warranty	5 years
Dimming method	DALI-2
Useful luminous flux (#use)	1700

Photometry

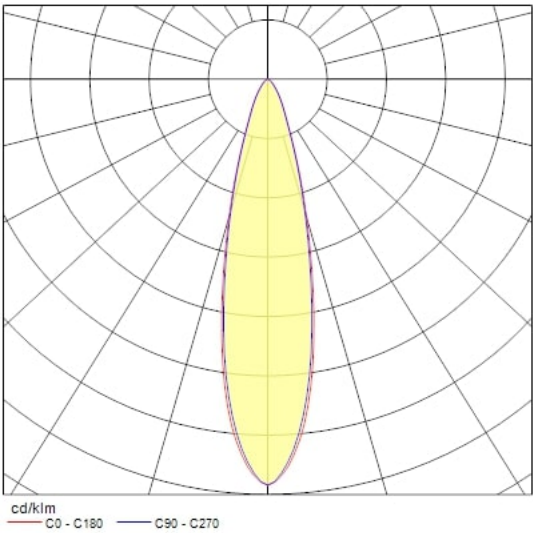

Technical drawings

