

### Features

- Round shaped in-ground luminaire with fixed light module, walk-over for pressure loads to 500kg (5kN), comes with 2m 3x1mm<sup>2</sup> flying lead and recessing tube, aluminium housing with Stainless steel (SS316) decorative ring and clear glass diffuser, IP67, IK10, Class I, non-dimmable, 125lm, 2.7W, 46lm/W, CRI80, 12° beam angle, 50000 hrs L70 B50 lumen maintenance, 100mm diameter, 129mm recessing tube height, 0.42kg weight.

### Product Overview


Product name	INTERRATA XS IP67 CLEAR 100LM 830 NB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ground recessed
E-number FI	4579501
Fixture luminous flux (lm)	125
Luminaire efficacy (lm/W)	46
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG0
Total power consumption (W)	2.7
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	Stainless steel
IP rating	IP67
IK rating	IK10
Product EAN number	5410288490380
Warranty	5 years

## INTERRATA XS IP67 CLEAR 100LM 830 NB 0049038


Colour Code

830

### Photometry

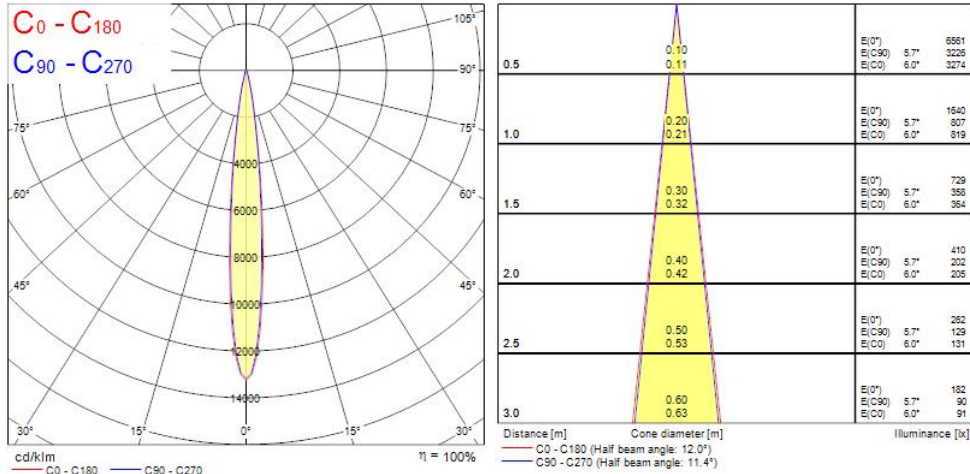

### Technical drawings

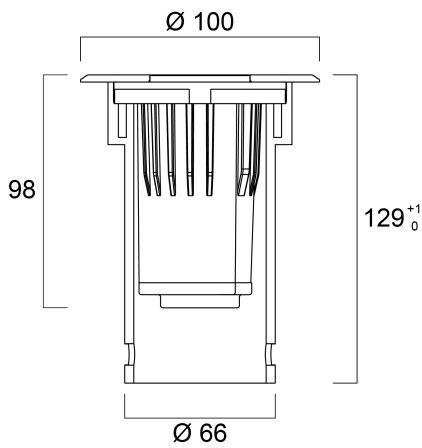

### Data table

#### GENERAL DATA

## INTERRATA XS IP67 CLEAR 100LM 830 NB 0049038

Product name	INTERRATA XS IP67 CLEAR 100LM 830 NB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ground recessed
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
E-number FI	4579501
Warranty	5 years

### OPTICAL DATA

Fixture luminous flux (lm)	125
Luminaire efficacy (lm/W)	46
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Photobiological Risk Group	RG0

### ELECTRICAL DATA

Total power consumption (W)	2.7
Primary Supply/Product voltage - min (V)	220
Electrical protection	Class I
Control gear required	No
Drive current (mA)	550
Inrush Current (A)	15
Inrush Duration (µs)	200
Energy Efficiency Class (A->G) of contained light source	G
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Low (6% - 20%)
Max. products per 10A C Breaker	60

## INTERRATA XS IP67 CLEAR 100LM 830 NB 0049038

Max. products per 20A B Breaker	72
---------------------------------	----

### LIFETIME DATA

Lifespan L70 B50	50000
------------------	-------

### PHYSICAL DATA

Housing colour	Stainless steel
IP rating	IP67
IK rating	IK10
Diffuser material	Glass
Nominal Product Diameter (mm)	100
Weight (kg)	0.42

### PACKAGING

Single packaging type	Carton
Product EAN number	5410288490380
Packaging single width (cm)	11.0
Packaging single depth (cm)	14.0
DUN14 (outer)	15410288490387
Packaging outer length / height (cm)	35.0

### SAFETY DATA

Optimal operating condition (°C)	-20-45
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	No