


Interrata Adjustable

INTERRATA ADJUSTABLE S IP67 CLEAR 400LM 830 MB

0049040

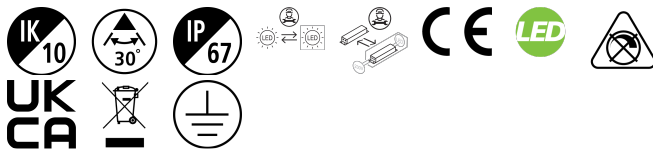

PRODUCT OVERVIEW


Product name	INTERRATA ADJUSTABLE S IP67 CLEAR 400LM 830 MB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ground recessed
E-number FI	4579503
Warranty	5 years
Fixture luminous flux (lm)	390
Luminaire efficacy (lm/W)	68
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	RG1
Total power consumption (W)	5.7
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	Stainless steel
IP rating	IP67
IK rating	IK10
Product EAN number	5410288490403

PHOTOMETRY

Interrata Adjustable

INTERRATA ADJUSTABLE S IP67 CLEAR 400LM 830 MB

0049040

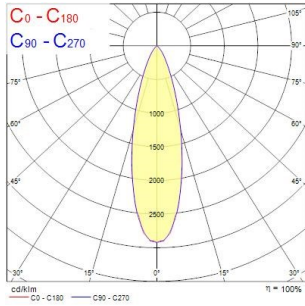

0.5	0.26 0.26	E0°: 450 E(C90): 14.8° E(C0): 14.4°
1.0	0.62 0.51	E0°: 1138 E(C90): 14.8° E(C0): 14.4°
1.5	0.78 0.77	E0°: 854 E(C90): 14.8° E(C0): 14.4°
2.0	1.03 1.03	E0°: 284 E(C90): 14.8° E(C0): 14.4°
2.5	1.28 1.28	E0°: 182 E(C90): 14.8° E(C0): 14.4°
3.0	1.55 1.54	E0°: 158 E(C90): 14.8° E(C0): 14.4°

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 28.9°)
— C90 - C270 (Half beam angle: 29.0°)

TECHNICAL DRAWINGS

