

# Giotto LED 305

*GIOTTO 305 3000K SURFACE DALI EMERGENCY*

3034793



## Product features

- Ambient and decorative round, surface mounted LED bulkhead luminaire. White robust polycarbonate body with opal diffuser, 1625lm, 18W, 91lm/W, 3000K, CRI 80, DALI, integral 3 hour maintained emergency, 120,000 hours lumen maintenance (L70:B50). Drive current: 600mA, IP44, IK10, Class I, 220-240V.



## PRODUCT OVERVIEW

Product name	GIOTTO 305 3000K SURFACE DALI EMERGENCY
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting, Wall surface mounted
Environment	Indoor
General application	Hospitality, Logistics & Industry
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	1625
Fixture luminous flux (Im)	1625
Luminous flux (Im)	1625
Luminaire efficacy (Im/W)	91
Correlated colour temperature (k)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	120
Glare control	< 24
Photobiological Risk Group	RG0
Luminous flux (emergency) (Im)	128
Luminous flux (emergency) (Im)	128
Total power consumption (W)	18
Electrical protection	Class I
Control gear type	LED driver constant current
Control gear mounting	Integrated
Dimmable	Yes
Dimming method	DALI
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP44

## Giotto LED 305

*GIOTTO 305 3000K SURFACE DALI EMERGENCY*  
3034793


IK rating

IK10

Product EAN number

8711971347934

### PHOTOMETRY

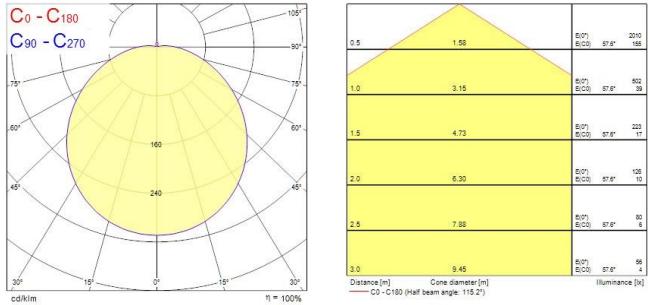

### TECHNICAL DRAWINGS

