



Features

- Energy efficient and affordable LED T8 solution to replace conventional fluorescent T8 lamps
- Omni-directional uniform light distribution thanks to glass tube construction design, same as traditional fluorescent T8 tubes
- High lumen package - 2000lm
- High lumen efficacy - 103 lm/W
- Switching cycles - 200,000X
- Average life 40,000 hours lifespan
- Lamp length - 1200mm
- Wide beam angle
- High power factor
- Suitable for general illumination in offices, supermarkets, department stores, train stations, petrol stations, parking lots and maintenance free applications
- Suitable for operation with electromagnetic gears / CCG and direct mains operation (220-240V)
- 3-Year warranty



Product Overview

Product name	ToLEDo T8 V7 4FT 2000LM 865 RL
Technology	LED
Watt (Rated) (W)	19.5
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Opal
Fixture rating	Open
General application	Hospitality, Logistics & Industry, Residential & Consumer
ETIM Class	EC001959
E-number FI	4941314
Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	170
Photobiological Risk Group	RG0

ToLEDo T8 V7 4FT 2000LM 865 RL 0029296

Wattage (W)	19.5
Power consumption (W)	19.5
Dimmable	No
Average life (Nominal) (h)	40000
IP rating	IP20
Product EAN number	5410288292960
Warranty	3 years
Useful luminous flux (#use)	2000

Technical drawings

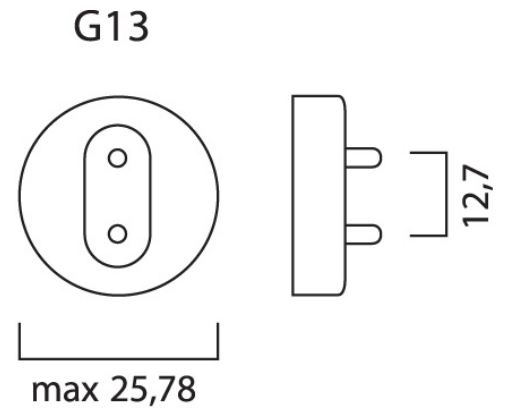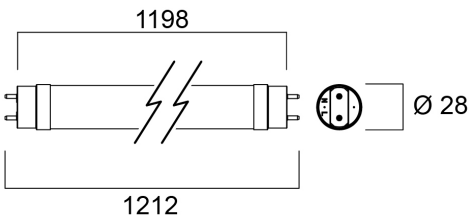

Data table

GENERAL DATA

Product name	ToLEDo T8 V7 4FT 2000LM 865 RL
Technology	LED
Watt (Rated) (W)	19.5
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Opal
Fixture rating	Open

ToLEDo T8 V7 4FT 2000LM 865 RL 0029296

General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C...+55°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4941314
Warranty	3 years

OPTICAL DATA

Useful luminous flux (#use)	2000
Luminous flux (Rated) (lm)	2000
Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Beam Angle (°)	170
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

ELECTRICAL DATA

Power consumption (W)	19.5
Wattage (W)	19.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.91
Control gear required	No
No. Of switching cycles before premature failures	>200000
Dimmable	No
Inrush Current (A)	23.2
Inrush Duration (µs)	330
Lamp Energy Label (class)	F

ToLEDo T8 V7 4FT 2000LM 865 RL 0029296

Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	28
Max. products per 16A B Breaker	17

LIFETIME DATA

Lifespan L70 B50	40000
Average life (Nominal) (h)	40000
Average life (Rated) (h)	40000

PHYSICAL DATA

IP rating	IP20
Nominal Product Length (mm)	1212.4
Nominal Product Diameter (mm)	28
Weight (kg)	0.2

PACKAGING

Product EAN number	5410288292960
Packaging single length / height (cm)	125.2
Packaging single width (cm)	2.9
Packaging single depth (cm)	2.9
DUN14 (inner)	15410288292967
Units per outer package	10
Packaging outer length / height (cm)	130.0
Packaging outer width (cm)	22.0
Packaging outer depth (cm)	10.5

SAFETY DATA

Optimal operating condition (°C)	-20-55
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	Yes
Safety message	Suitable for totally enclosed fixture


SYLVANIA

ToLEDo T8 V7 4FT 2000LM 865 RL
0029296

Energy label



0029296

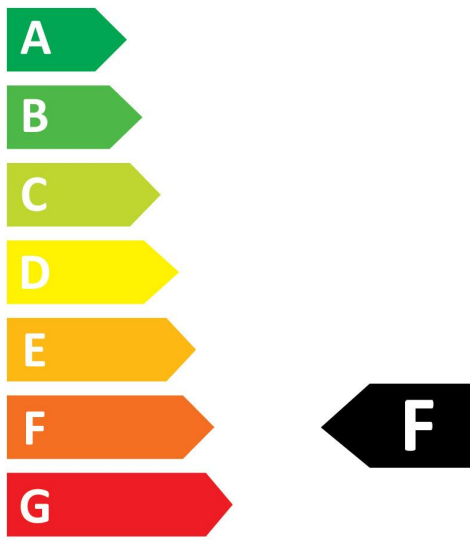


20
kWh/1000h



2019/2015



0029296

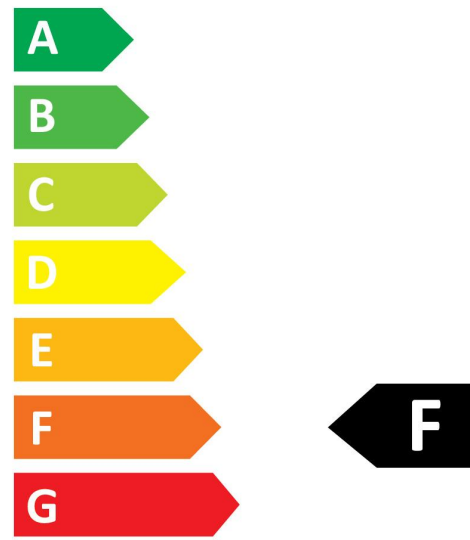

20
kWh/1000h



2019/2015