


## 17PK-2004: Straight male adapter 20x1/2"

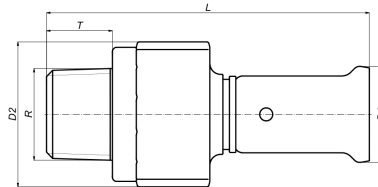

### Commercial information

PVDF press fittings in combination with multilayer pipe, a completely corrosion-free system. The synthetic press fittings are made from injection moulded PVDF (Polyvinylidene fluoride)\*. PVDF offers the user a unique combination of properties:

- Highly resistant to pressure and temperature
- Excellent mechanical strength
- Extreme flexibility: bending up to 10° is possible
- Perfectly suited for drinking water and food
- Highly resistant to chemicals and corrosion
- Embedding is possible without extra protection

### Certificates

ATG, QB (CSTBat), DVGW Wasser, ETA, KIWA, ÖVGW Wasser, SINTEF, WRAS, KOMO, STF, ÖN EN 21003-2/-3, GOST-R, ITC, TSU, AFNOR, PZH, ACS, DNV-GL, Aenor, Sans 21003, Kontrol Biro, RISE, EMI

### Applications

Potable water, Heating, Compressed air, Cooling, Sanitary

### Solutions

Building installations, Industry, Utility, Shipbuilding

## Technical characteristics

Material connection 1	Polyvinylidene fluoride (PVDF)	Bend angle	0 Degrees
Material quality connection 1	Polyvinylidene fluoride (PVDF) (expired)	Bend radius	0 Millimetre
Surface protection connection 1	Untreated	Outer pipe diameter connection 1	20 Millimetre
Surface treatment connection 1	Untreated	Length	74.5 Millimetre
Material connection 2	Brass	Length of connection 1	37 Millimetre
Material quality connection 2	CuZn40Pb2 (CW617N)	Working length connection 1	10 Millimetre
Surface protection connection 2	Untreated	Length of connection 2	38 Millimetre
Surface treatment connection 2	Untreated	Working length connection 2	23.5 Millimetre
Shape	Straight	Wrench width	0 Millimetre
Reducing	✗	Wrench width union nut	0 Millimetre
Eccentric	✗	Tightening moment	0 0 Newtonmetre
System specific	✓	Medium temperature (continuous)	-10 70 Degrees celsius
Connection 1	Press sleeve	Max. operating pressure at 20 °C	16 Bar
Contour code connection 1	TH	Standard Dimension Ratio (SDR)	0
Nominal diameter connection 2	1/2 inch (15)		
Connection 2	External thread conical BSPT-R (ISO 7-1 / EN 10226-1)		
Main colour fitting	Black		
Material sealing	Ethylene-propylene diene monomer rubber (EPDM)		
With buffer stud	✓		
High tensile strength	✗		
With thermal insulation	✗		
Ring stiffness class	Other		
With sealing rings/gaskets	✓		
Capped	✗		
With connection indicator	✗		
With drain valve	✗		
With de-aerator	✗		
FM quality mark	✗		
LPCB quality mark	✗		
ULC quality mark	✗		
UL quality mark	✗		
DIN-CERTCO certificate	✗		
VdS quality mark	✗		
With approval for TÜV	✗		
DVGW quality mark for gas	✗		
DVGW quality mark for water	✓		
Certified according to NF 545	✗		
KIWA certified	✓		
Gastec QA mark	✗		
KOMO certified	✓		
Type approval according to BBR/EKS	✗		

## Related products

Product code	GTIN	Description
PRESSCHECK1432	05414764019904	Henco Tool to control the accuracy of a pressing Ø14-32
BE20	05414764019904	Henco Jaws (universal) BE/TH-Profile 20x2
PK-TOOL04	05414764019904	Henco Wrench for PK/SK fittings with threading 1/2"

### Image



