


Interrata Adjustable

INTERRATA ADJUSTABLE L IP67 CLEAR 2000LM 840 MB

0049045

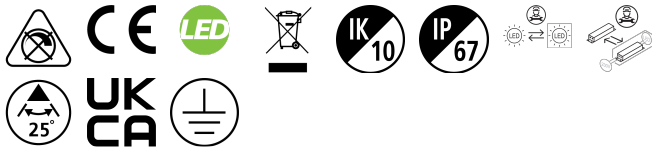

PRODUCT OVERVIEW

Product name	INTERRATA ADJUSTABLE L IP67 CLEAR 2000LM 840 MB
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ground recessed
E-number FI	4579508
Warranty	5 years
Fixture luminous flux (lm)	2075
Luminaire efficacy (lm/W)	72
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	RG1
Total power consumption (W)	29
Electrical protection	Class I
LED Flickering Rate	Low (6% - 20%)
Housing colour	Stainless steel
IP rating	IP67
IK rating	IK10
Product EAN number	5410288490458

PHOTOMETRY


Interrata Adjustable

INTERRATA ADJUSTABLE L IP67 CLEAR 2000LM 840 MB
0049045

0.5	0.24	E:07	3298
	0.23	E:09	14513
		E:10	14864
1.0	0.48	E:07	8299
	0.47	E:09	3602
		E:10	3748
1.5	0.73	E:07	5599
	0.70	E:09	2324
		E:10	2395
2.0	0.97	E:07	4105
	0.95	E:09	1712
		E:10	1757
2.5	1.21	E:07	3296
	1.16	E:09	1388
		E:10	1439
3.0	1.45	E:07	2802
	1.40	E:09	1208
		E:10	1269

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 36.3°)
— C90 - C270 (Half beam angle: 27.2°)

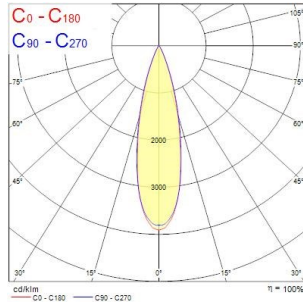

TECHNICAL DRAWINGS

