
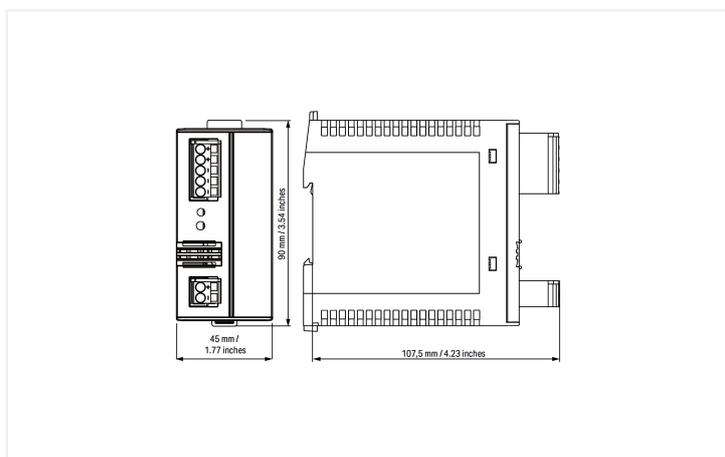


Data Sheet | Item Number: 787-1650

DC/DC Converter; 24 VDC input voltage; 12 VDC output voltage; 4 A output current; galvanically isolated

<https://www.wago.com/787-1650>

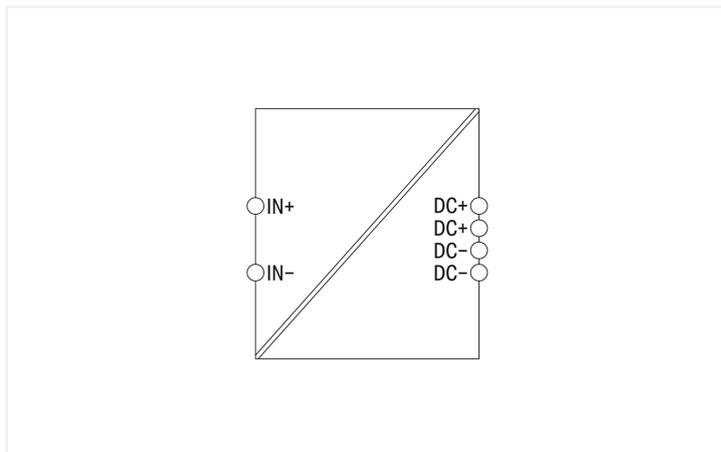

Features:

- Switched-mode power supply
- Natural convection cooling when horizontally mounted
- Suitable for both parallel and series operation
- Electrically isolated output voltage (SELV) per EN 60950-1
- Control deviation: $\pm 1\%$

Technical data

Input

Nominal input voltage $U_{i, nom}$	24 VDC
Input voltage range	18 ... 60 VDC
Nominal mains frequency range	0 Hz
Input current I_i	≤ 2.56 A (24 VDC); ≤ 0.96 A (60 VDC); ≤ 3.39 A (18 VDC)
Discharge current	≤ 0.25 mA
Inrush current	≤ 60 A (NTC)
Mains failure hold-up time	≥ 5 ms (24 VDC)

Output

Nominal output voltage $U_{o, nom}$	12 VDC (SELV)
Output voltage range	11.5 ... 14.5 VDC (adjustable)
Default Setting	12 VDC
Nominal output current $I_{o, nom}$	4 A
Nominal output power	48 W
Deviation	$\leq 1\%$
Residual ripple	≤ 50 mV (peak-to-peak)
Current limitation	$1.1 \times I_{o, nom}$ (typ.)
Overload behavior	Constant current

Signaling and Communication

Signaling	1 x Status indication LED (green)
Operation status indicator	Green LED (U _o)

Efficiency/Power Losses

Power loss P _I	≤ 1 W; ≤ 11.7 W (DC _{in} 24 V / 4 A)
Power loss (max.) P _{I(max)}	15 W (DC _{in} 18 V / 4 A)
Efficiency (typ.)	84 %

Circuit Protection

Internal fuse	T 4 A / 250 VDC
Backup fuse (recommended)	T 6.3 A

Safety and protection

Isolation voltage (pri.-sec.)	2.2 kVDC
Protection class	III
Protection type	IP20; per EN 60529
Resistance to reverse feed	≤ 25 VDC
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	Internal protective circuit ≤ 35 VDC (in the event of a fault)
Short-circuit-protected	Yes
Open-circuit-proof	Yes
Parallel operation	Yes
Series operation	Yes
MTBF	> 500,000 h (per IEC 61709)

Connection Data

Connection 1

Connection type	Input/output/signaling
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 721 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Width	45 mm / 1.772 inches
Height	90 mm / 3.543 inches
Depth from upper-edge of DIN-rail	107.5 mm / 4.232 inches

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material data

Flammability class per UL94	V0
Fire load	0 MJ
Weight	240 g

Environmental requirements

Ambient temperature (operation)	-25 ... +70 °C
Ambient temperature (storage)	-25 ... +85 °C
Relative humidity	5 ... 96 % (no condensation permissible)
Derating	-2 %/K (> 55 °C)
Climatic category	3K3 (per EN 60721)

Standards and Specifications

Conformity marking	CE
Standards/specifications	EN 61010-1 EN 61010-2-201 EN 61204-3 EN 61558-2-16

Commercial data

PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143737593
Customs tariff number	85044083900

Product Classification

UNSPSC	39121004
eCl@ss 10.0	27-04-07-01
eCl@ss 9.0	27-04-07-01
ETIM 9.0	EC002540
ETIM 10.0	EC002540
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 004/2011	EAC CoC 03078
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03081

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search			
Environmental Product Compliance 787-1650			↓

Documentation

Bid Text			
787-1650	01.07.2019	xml 5.86 KB	↓
787-1650	24.06.2019	docx 19.16 KB	↓

Instruction Leaflet			
DC/DC Converter	01.03.2018 08.10.2020	pdf 170.48 KB	↓

CAD/CAE-Data

CAD data			
2D/3D Models 787-1650			↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Tool

1.1.1.1 Operating tool



Item No.: [210-769](#)
SCREWDRIVER; green