

Data Sheet | Item Number: 2706-210/000-004



PCB terminal block; lever; 6 mm²; Pin spacing 10 mm; 10-pole; CAGE CLAMP®; black

<https://www.wago.com/2706-210/000-004>



Color: ■ black

Similar to illustration

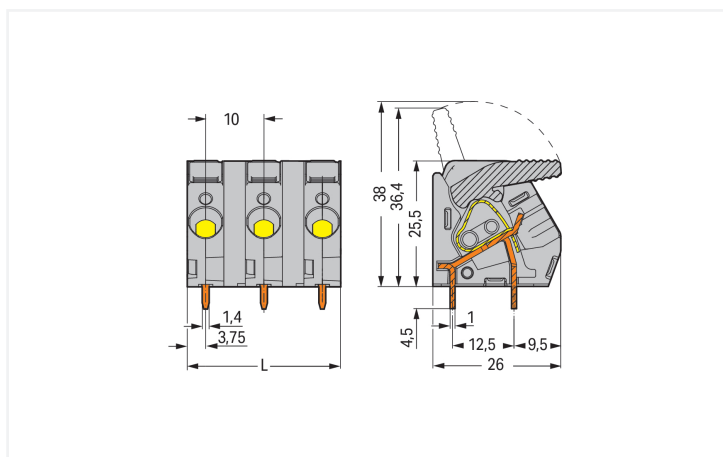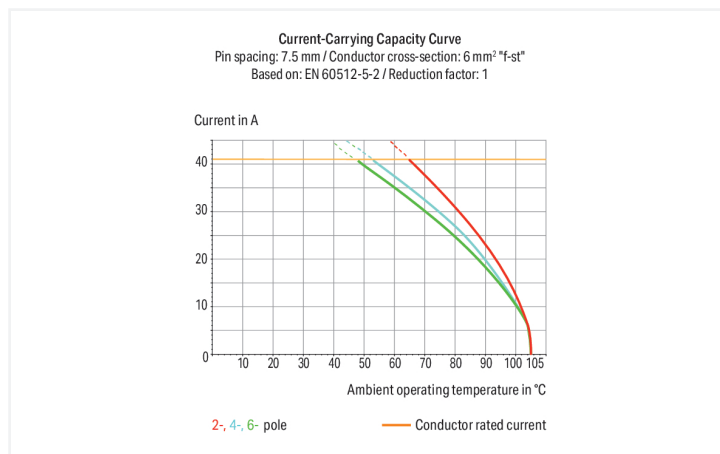

Dimensions in mm

L = (pole no. x pin spacing) – 2.5 mm

PCB terminal block, 2706 Series, CAGE CLAMP®

This PCB terminal block (item number 2706-210/000-004) streamlines wire connections, making them both quick and easy. It is ideal for custom installations with different mounting types. Ensure that the strip lengths are between 11 and 12 mm when connecting conductors to this PCB terminal block. This product incorporates one conductor terminal and utilizes CAGE CLAMP®. Our highly-rated and maintenance-free CAGE CLAMP® connection makes it easy to connect all types of conductors without having to prepare the conductor. For example, you don't need to crimp ferrules. Dimensions: (95 x 30 x 26) mm (width x height x depth). Depending on the type of conductor, this PCB terminal block is designed for conductor cross sections ranging from 0.5 mm² to 6 mm².

The contact surface is coated with tin. This PCB terminal block is operated with a lever. The PCB terminal block is designed for THT soldering. Insert the conductor at a 30° angle..



Notes	
Variants:	Other pole numbers Other colors Mixed-color PCB connector strips Direct marking Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		800 V	1000 V	1000 V
Rated impulse withstand voltage		8 kV	8 kV	8 kV
Rated current		41 A	41 A	41 A
Approvals per		UL 1059		
Use group		B	C	D
Rated voltage		300 V	150 V	600 V
Rated current		30 A	30 A	5 A

Connection Data																				
Clamping units	10	Connection 1 <table><tr><td>Connection technology</td><td>CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Lever</td></tr><tr><td>Solid conductor</td><td>0.5 ... 6 mm² / 20 ... 10 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.5 ... 6 mm² / 20 ... 10 AWG</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.5 ... 6 mm²</td></tr><tr><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.5 ... 6 mm²</td></tr><tr><td>Strip length</td><td>11 ... 12 mm / 0.43 ... 0.47 inches</td></tr><tr><td>Conductor connection direction to PCB</td><td>30 °</td></tr><tr><td>Pole number</td><td>10</td></tr></table>	Connection technology	CAGE CLAMP®	Actuation type	Lever	Solid conductor	0.5 ... 6 mm² / 20 ... 10 AWG	Fine-stranded conductor	0.5 ... 6 mm² / 20 ... 10 AWG	Fine-stranded conductor; with insulated ferrule	0.5 ... 6 mm²	Fine-stranded conductor; with uninsulated ferrule	0.5 ... 6 mm²	Strip length	11 ... 12 mm / 0.43 ... 0.47 inches	Conductor connection direction to PCB	30 °	Pole number	10
Connection technology	CAGE CLAMP®																			
Actuation type	Lever																			
Solid conductor	0.5 ... 6 mm² / 20 ... 10 AWG																			
Fine-stranded conductor	0.5 ... 6 mm² / 20 ... 10 AWG																			
Fine-stranded conductor; with insulated ferrule	0.5 ... 6 mm²																			
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 6 mm²																			
Strip length	11 ... 12 mm / 0.43 ... 0.47 inches																			
Conductor connection direction to PCB	30 °																			
Pole number	10																			
Total number of potentials	10																			
Number of connection types	1																			
Number of levels	1																			

Physical data	
Pin spacing	10 mm / 0.394 inches
Width	95 mm / 3.74 inches
Height	30 mm / 1.181 inches
Height from the surface	25.5 mm / 1.004 inches
Depth	26 mm / 1.024 inches
Solder pin length	4.5 mm
Solder pin dimensions	1 x 1.4 mm
Drilled hole diameter with tolerance	1.8 (+0.1) mm

PCB contact	
PCB contact	THT
Solder pin arrangement	over the entire terminal strip (in-line)
Number of solder pins per potential	2



Material data		
Note (material data)		Information on material specifications can be found here
Color		black
Material group		I
Insulation material (main housing)		Polyamide (PA66)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Electrolytic copper (E _{Cu})
Contact Plating		Tin
Fire load		1.2 MJ
Weight		60.5 g

Environmental requirements		
Limit temperature range		-60 ... +105 °C

Commercial data		
Product Group		4 (Printed Circuit Connectors)
PU (SPU)		10 pcs
Packaging type		Box
Country of origin		PL
GTIN		4050821251309
Customs tariff number		85369010000

Product Classification		
UNSPSC		39121409
eCl@ss 10.0		27-44-04-01
eCl@ss 9.0		27-44-04-01
ETIM 9.0		EC002643
ETIM 10.0		EC002643
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CSA DEKRA Certification B.V.	C22.2 No. 158	2516072
UL UL International Germany GmbH	UL 1059	E45172



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance2706-210/000-004

↓

Documentation

Additional Information

Technical Section03.04.2019pdf2027.26 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models2706-210/000-004

↓

CAE data

ZUKEN Portal2706-210/000-004

↓

PCB Design

Symbol and Footprint via SamacSys2706-210/000-004

↓

Symbol and Footprint via Ultra Librarian2706-210/000-004

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule



[Item No.: 216-262](#)
Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



[Item No.: 216-263](#)
Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



[Item No.: 216-264](#)
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



[Item No.: 216-284](#)
Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black



[Item No.: 216-289](#)
Ferrule; Sleeve for 10 mm² / AWG 8; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



[Item No.: 216-266](#)
Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



[Item No.: 216-286](#)
Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; blue



[Item No.: 216-267](#)
Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



[Item No.: 216-287](#)
Ferrule; Sleeve for 4 mm² / AWG 12; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



[Item No.: 216-208](#)
Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow



[Item No.: 216-288](#)
Ferrule; Sleeve for 6 mm² / AWG 10; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; yellow



[Item No.: 216-108](#)
Ferrule; Sleeve for 6 mm² / AWG 10; uninsulated; electro-tin plated; silver-colored

1.1.2 Test and measurement

1.1.2.1 Testing accessories




Item No.: 210-136


Test plug; 2 mm Ø; with 500 mm cable; red

Installation Notes

Conductor termination




To open the clamping unit, pull the operating lever all the way back — 2706 and 2716 Series.



Inserting/removing a conductor – 2706 and 2716 Series.

Testing



Testing with test plug – 2706 and 2716 Series.