

## ToLEDo Striplight

*ToLEDo Striplight V3 310MM 806LM S19*  
0028107



### Product features

- LED Striplight replacement for incandescent lamp
- High lumen output: up to 806lm
- 15,000 hours average rated life
- Up to 85% energy saving
- Creates a warm ambiance similar to traditional lamps
- Perfect for kitchen, mirror lighting, shaver lighting, bathroom
- 3 year warranty



## ToLEDo Striplight

ToLEDo Striplight V3 310MM 806LM S19  
0028107

### PRODUCT OVERVIEW

Product name	ToLEDo Striplight V3 310MM 806LM S19
Technology	LED
Watt (Rated) (W)	8.5
Type	LED exchangeable
Cap/Base	S19
Fixture rating	Open
General application	Hospitality, Residential & Consumer
ETIM Class	EC001959
E-number FI	4741152
Warranty	3 years
Luminous flux (lm)	806
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0
Wattage (W)	8.5
Dimmable	No
Average life (Nominal) (h)	15000
Product EAN number	5410288281070

### DATA TABLE

#### General data

Product name	ToLEDo Striplight V3 310MM 806LM S19
Technology	LED
Watt (Rated) (W)	8.5
Type	LED exchangeable
Cap/Base	S19
Fixture rating	Open
General application	Hospitality, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
E-number FI	4741152
Warranty	3 years

#### Optical data

Luminous flux (lm)	806
Luminous flux (Rated) (lm)	806
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG0

## ToLEDo Striplight

ToLEDo Striplight V3 310MM 806LM S19

0028107

Lumen maintenance at end of nominal life (%) 70

### Electrical data

Wattage (W)	8.5
Equivalent watt (W)	60
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	1
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	1
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	3.3
Inrush Duration (µs)	290
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 10A C Breaker	251
Max. products per 13A C Breaker	327
Max. products per 16A C Breaker	49
Max. products per 20A C Breaker	505
Max. products per 16A B Breaker	24

### Lifetime data

Lifespan L70 B50	15000
Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

### Physical data

Nominal Product Length (mm)	309
Nominal Product Diameter (mm)	38
Weight (kg)	0.066

### Packaging

Single packaging type	Carton
Product EAN number	5410288281070
Packaging single length / height (cm)	31.7
Packaging single width (cm)	4.0
Packaging single depth (cm)	4.0
DUN14 (outer)	15410288281077
Units per outer package	6
Packaging outer length / height (cm)	32.4
Packaging outer width (cm)	8.4
Packaging outer depth (cm)	12.5

## ToLEDo Striplight


ToLEDo Striplight V3 310MM 806LM S19

0028107


### Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

## PHOTOMETRY

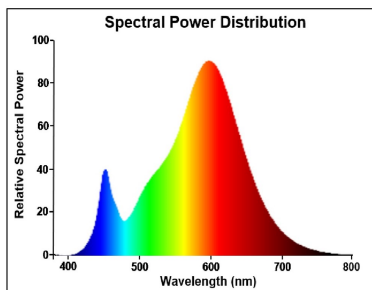

## TECHNICAL DRAWINGS




## ToLEDo Striplight

ToLEDo Striplight V3 310MM 806LM S19  
0028107



SYLVANIA

0028107

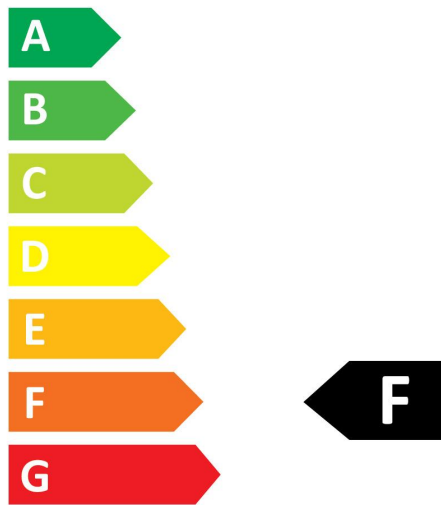

**9**  
kWh/1000h




2019/2015

ToLEDo Striplight  
*ToLEDo Striplight V3 310MM 806LM S19*  
0028107



0028107

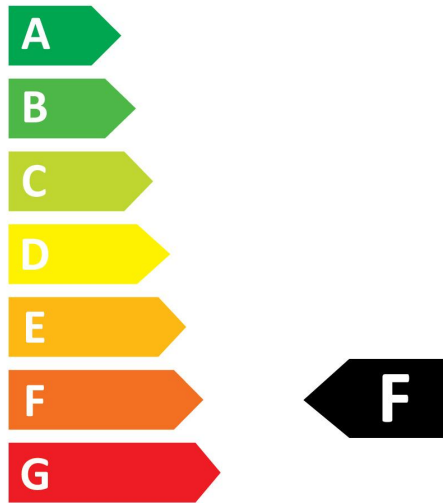

**9**  
kWh/1000h



2019/2015