

Start Surface IP66 Ø350mm DALI  
START SURFACE IP66 1500LM 840 IK10 DALI WHT  
0049246




PRODUCT OVERVIEW

|                                 |                                             |
|---------------------------------|---------------------------------------------|
| Product name                    | START SURFACE IP66 1500LM 840 IK10 DALI WHT |
| Technology                      | LED                                         |
| Cap/Base                        | N/A                                         |
| Housing                         | PC Polycarbonate                            |
| Mount                           | Ceiling surface mounting                    |
| Environment                     | Indoor, Outdoor                             |
| Warranty                        | 5 years                                     |
| Fixture luminous flux (lm)      | 1500                                        |
| Luminaire efficacy (lm/W)       | 94                                          |
| LOR (%)                         | 100                                         |
| Colour temperature (K)          | 4000                                        |
| Colour Code                     | 840                                         |
| Light colour                    | Neutral White                               |
| CRI (Ra)                        | 80                                          |
| Colour Variation Initial (SDCM) | SDCM6                                       |
| Glare control                   | < 25                                        |
| Photobiological Risk Group      | RG0                                         |
| Total power consumption (W)     | 16                                          |
| Electrical protection           | Class II                                    |
| Control gear type               | LED driver constant current                 |
| Control gear mounting           | Integrated                                  |
| LED Flickering Rate             | Ultra low (5% or less)                      |
| Housing colour                  | RAL 9003 - Signal white                     |
| IP rating                       | IP66                                        |
| IK rating                       | IK10                                        |
| Product EAN number              | 5410288492469                               |

PHOTOMETRY

Start Surface IP66 Ø350mm DALI  
START SURFACE IP66 1500LM 840 IK10 DALI WHT  
0049246

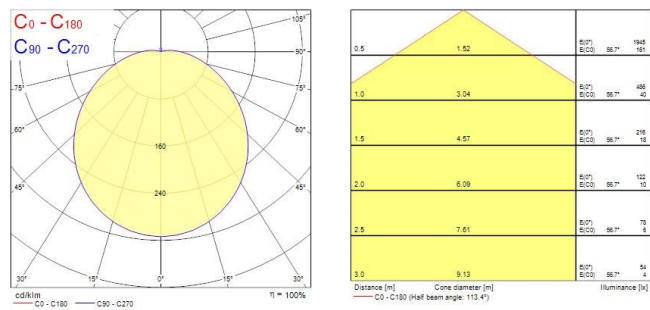

TECHNICAL DRAWINGS

