



PHOTOMETRIC LIGHT REPORT

Ceiling Light | Ø180mm | 8 Watt | 3-CCT

Article number: 136-006



Go to the
webshop
of Tronix
Lighting



TRONIX



136-006 Ceiling Light | Ø180mm | 8 Watt | 3-CCT

Introduction

Purpose of this Document

This document provides accurate and objective photometric data for Tronix Lighting item 136-006. All information is based on actual measurements taken from standard production units. No modifications were made to enhance performance results. In some cases, minor adjustments—such as temporary removal of covers, cables, or mounting features—were necessary for testing purposes. These did not influence product performance.

Test Methodology

Testing was conducted using randomly selected, unopened samples from regular inventory. All tests comply with the LM-79-19 standard, the recognized method for photometric and electrical measurements of LED and OLED luminaires. This standard, an update of IES LM-79-2008, outlines environmental test conditions, stabilization procedures, measurement methods, and approved instruments. It uses absolute photometry, meaning results directly reflect the performance of the tested product, without comparison to rated lamp standards.

Product 136-006 was tested using:

- A photogoniometer to measure luminous intensity distribution at various angles
- An integrating sphere to determine total luminous flux and colour characteristics

Compliance & Certification

Item 136-006 meets the requirements of the following EU directives. Tronix Lighting certifies that all relevant tests were executed in accordance with the applicable standards, and the CE mark is applied accordingly:

- General Product Safety – Directive 2023/988/EC
- Low Voltage Directive (LVD) – Directive 2014/35/EU
- Electromagnetic Compatibility (EMC) – Directive 2004/108/EC
- Ecodesign – Directive 2009/125/EC
- RoHS 3 – Directive 2011/65/EU + Amendment 2015/863/EU

Recycling & Sustainability

Tronix Lighting is affiliated with national recycling systems for electrical and electronic waste. The luminaire is over 90% recyclable when disposed of as electronic waste at end of life. In addition, Tronix Lighting participates in national packaging recycling schemes, ensuring full compliance with both the WEEE and packaging directives.



136-006 Ceiling Light | Ø180mm | 8 Watt | 3-CCT

Laboratory and equipment

Laboratory owner and location	Tronix Lighting BV. Uden. The Netherlands
Gonio spectrometer system and type	Viso Systems Type C. horizontal
Spectrometer manufacturer and model	(Gonio) Ocean Optics STS VIS (Sphere) Admesy HERA VIS 380–780nm
Flicker meter manufacturer and model	Viso Systems LabFlicker
Oscilloscope manufacturer and model	Tektronix MDO3024 oscilloscope (4 Channels. 200 MHz)
Power meter manufacturer and model	Vitretek PA900 Precision Multi-Channel Harmonic Power Analyzer
Power source manufacturer and model	(DC) Keithley Source Measure Unit SMU-2420 3A DC Source Meter (AC) Chroma 61601 AC Source
Datalogger Manufacturer and Model	Omega 8-Channel Thermocouple Thermometer/Data Logger

Measurement conditions gonio spectrometer

Number of C-planes and Resolution	2 planes – 180°
γ (gamma)-Resolution	2.5°
Test Distance	1.81 m
Room Temperature and Humidity	22°C +/- 10% – RH 50% +/- 20%
Input Power. Power and Displacement Factors	7.3 W – PF 0.59 – DPF 0.89
Frequency of Input Power	50 Hz
Warm-up Time and Variation	Lamp stabilized in 17 min 45 sec --3.4%

Tested light source

Manufacturer and Order Code	Tronix Lighting – 136-006
Product Description	Ceiling Light Ø180mm 8 Watt 3-CCT

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	616 lm – 15.98% / 84.02%
Efficiency	85 lm/W
Energy efficiency class	G
Peak Intensity and Beam Angle	139 cd – 132.3°
Correlated Colour Temperature	CCT = 3930 K
Colour Shift. CIE duv	Duv -0.0051
Colour Rendering Index	CRI 89.2
Colour Rendering TM30-18	R _f 87.4 – R _g 97.8
Television Lighting Consistency Index	TLCI = 79
Flicker	SVM 0.02 – PstLM 0.03



136-006 Ceiling Light | Ø180mm | 8 Watt | 3-CCT


Electrical measurement details

Input Power

RMS Input voltage feed. V_{RMS}	229 V
RMS Input current feed. I_{RMS}	0.054 A
Total input power	7.3 W
Frequency of input power	50 Hz
Power factor	0.59
Displacement power factor	0.89
Total harmonic distortion of the current	112.07%
Total harmonic distortion of the voltage	2.41%

Input Power Curve

Voltage - Current

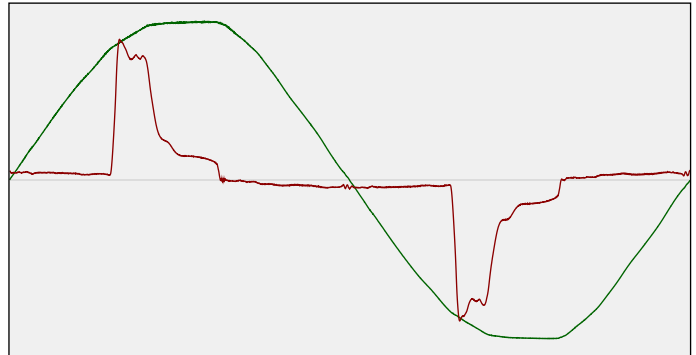

Efficiency

Radiated power efficiency: 27.2%




Lumen efficiency: 85 lm/W



Harmonics

3rd Harmonic	72.03%
5th Harmonic	50.3%
7th Harmonic	41.01%
9th Harmonic	36.46%
11th Harmonic	26.69%

Current Harmonics %

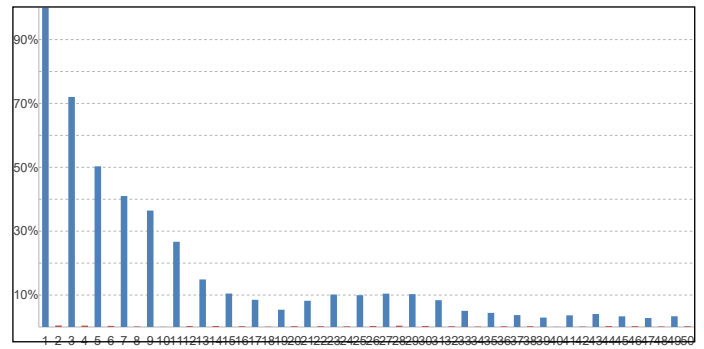

Stabilization Details

Warm-up Conditions

Stable period	15 min	Colour temperature change during warm-up	CCT start	3893 K
Stable change max	2.0%		CCT shift	+38 K
Minimum warm-up time	15 min		CCT end	3930 K

Warm-up Results

Total warmup time	Lamp stabilized in 17 min 45 sec	Output intensity change during warm-up	Output start	635 lm
Warmup variation	-3.4%		Output change	-20 lm
			Output end	616 lm




136-006 Ceiling Light | Ø180mm | 8 Watt | 3-CCT

Colour measurement details


Total lumen output 616 lm
 Correlated Colour Temperature 3930 K
 Colour coordinates CIE 1931 (x;y) = (0.380;0.366)
 Colour deviation from BBL Duv = -0.0051

TM30-18 Colour Fidelity Index R_f 87.4
 TM30-18 Colour Gamut Index R_g 97.8
 Colour Rendering Index (Ra) CRI 89.2
 Colour Rendering Index. (red component) $R_9 = 36.3$


Colour Quality Scale CQS = 86.6
 Television Lighting Consistency Index TLCI = 79

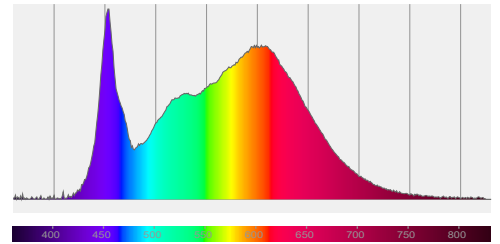

Relative spectral power distribution

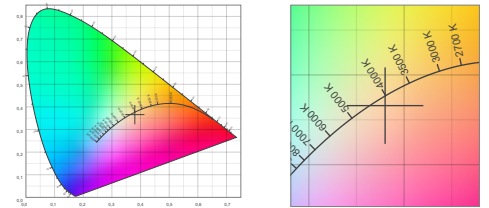

TM30 details

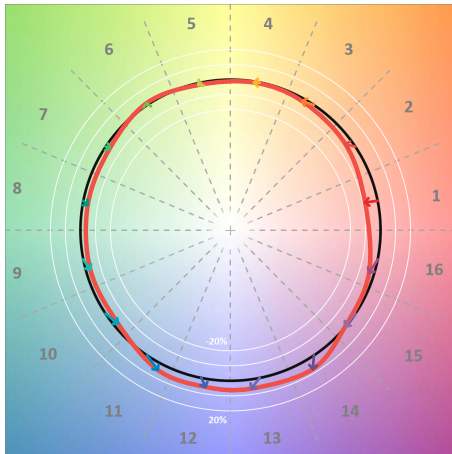


TM30 Colour vectors per hue bin




TM30 Colour distortion


Hue Bin	R_f	Shifts (%)	
		Chroma	Hue
C1	85	-9%	1%
C2	88	-5%	5%
C3	84	-2%	8%
C4	91	-1%	4%
C5	92	-1%	2%
C6	95	1%	-1%
C7	94	-3%	-1%
C8	92	-4%	2%
C9	89	-3%	7%
C10	83	-3%	10%
C11	82	4%	11%
C12	86	6%	4%
C13	87	6%	-7%
C14	90	7%	-6%
C15	84	-1%	-11%
C16	82	-4%	-10%

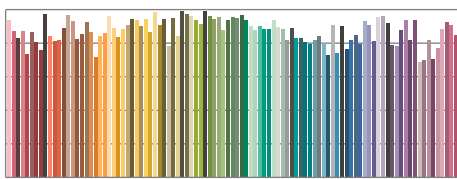

TM30-18 R_f -values per reference colour

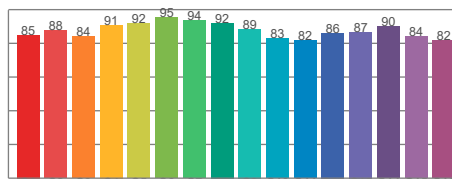


TM30-18 R_f -values per hue bin

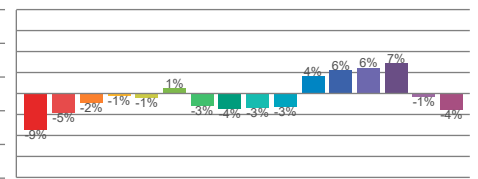


TM30 Chroma shift

Colour Quality details

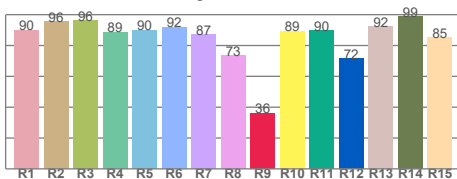

Colour Rendering Index

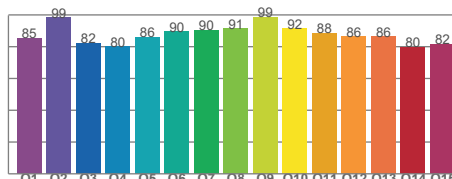

Colour Quality Scale



136-006 Ceiling Light | Ø180mm | 8 Watt | 3-CCT

Flicker / temporal light artefacts details

Measurement conditions

Flicker meter type	Viso Systems LabFlicker
Flicker/TLA sample rate	20000 samples/s
Measurement time	5x 180 seconds (15 minutes) for PstLM. 1.2 sec for all other indices

Flicker indices according to Illuminating Engineering Society (IES)


Flicker frequency	100 Hz
Percent flicker	0.51 %
Flicker index	0

TLA indices (according IEC TR 61547-1, EN 61000-3-3 and EN 61000-4-15)

An LED luminaire is considered flicker-free if the SVM value is ≤ 0.4 and if the PstLM value is ≤ 1.0

PstLM value (F < 80 Hz)	0.03
SVM value (80 < F < 2000 Hz)	0.02


Flicker frame (one flicker period in time domain)

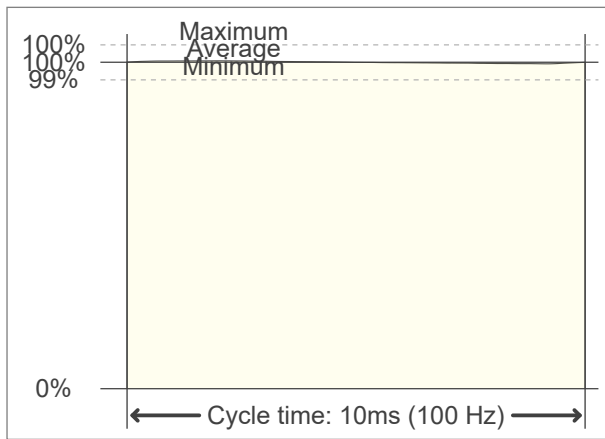

Flicker FFT (flicker curve in frequency domain)



IEEE 1789-2015 Lighting Flicker Risk Zones

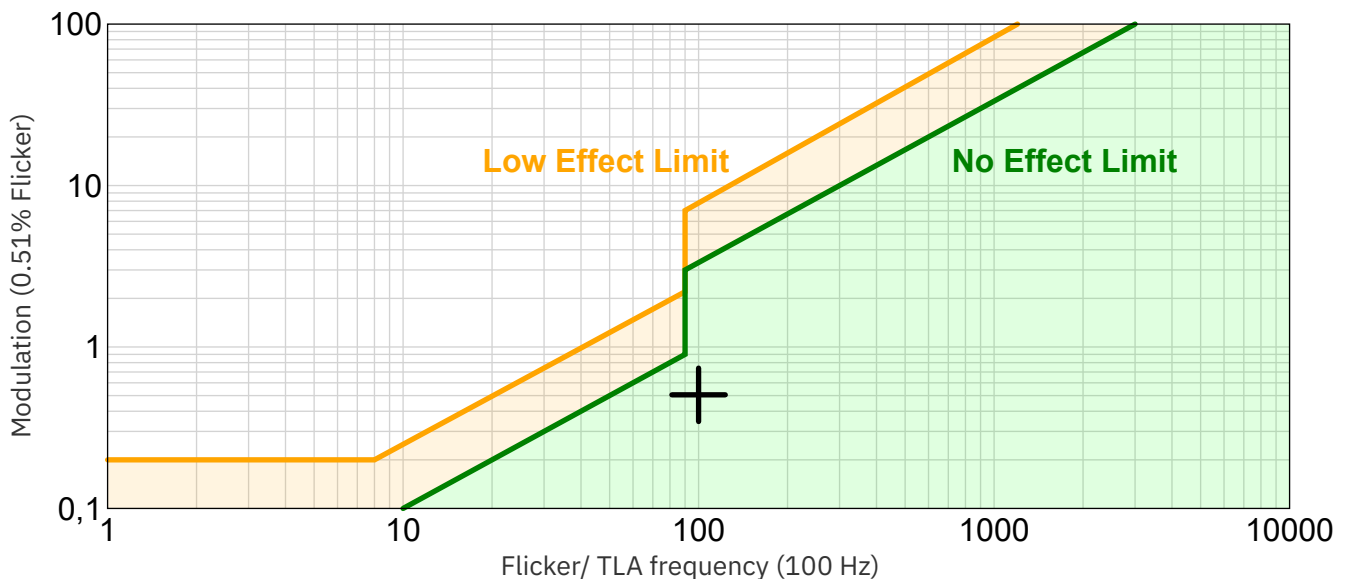

Document revision date: 1-7-2025 Measurement serial: VFR-250224-3232-MS




136-006 Ceiling Light | Ø180mm | 8 Watt | 3-CCT

Beam angle

Luminous Intensity diagram

Unit: 0-100% of peak intensity

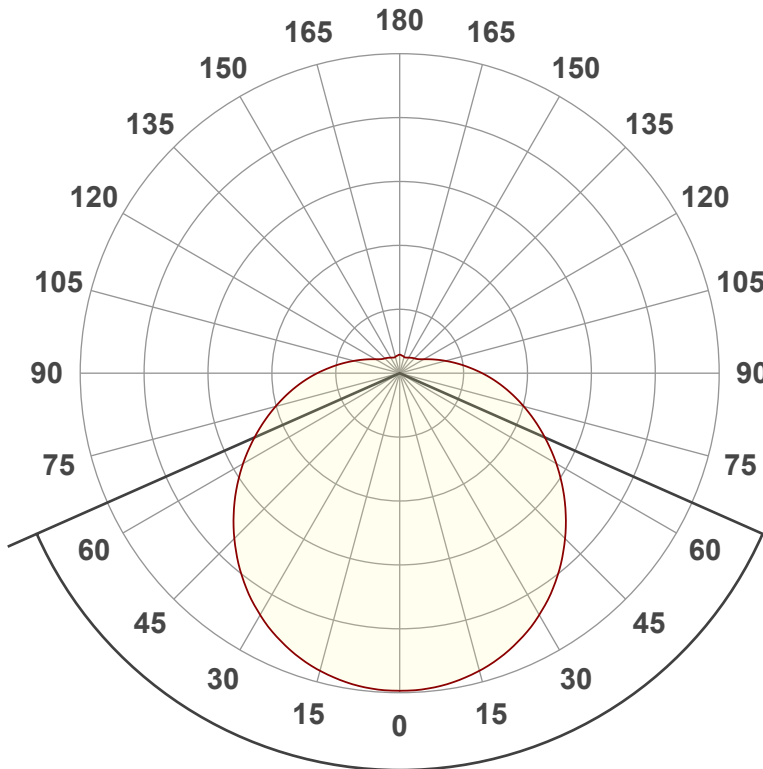

132,3°

Main Values

Output (total Lumen)	616 lm
Lumen Up/Down	15.98% / 84.02%
Peak Intensity	139 cd
Beam Angle (50%)	132.3°
Beam Angle (90%)	132.3°
Beam Angle (10%)	132.3°

Cut-off Angle

Average 2.5%	360°
--------------	------

Field Angle

Average 10%	232.2°
-------------	--------


Intensity Ratio

In 120° cone	55.3%
In 90° cone	36.1%

C planes

- C000-C180
- C090-C270

Linear distribution diagram - Intensity (candela) vs γ-angle

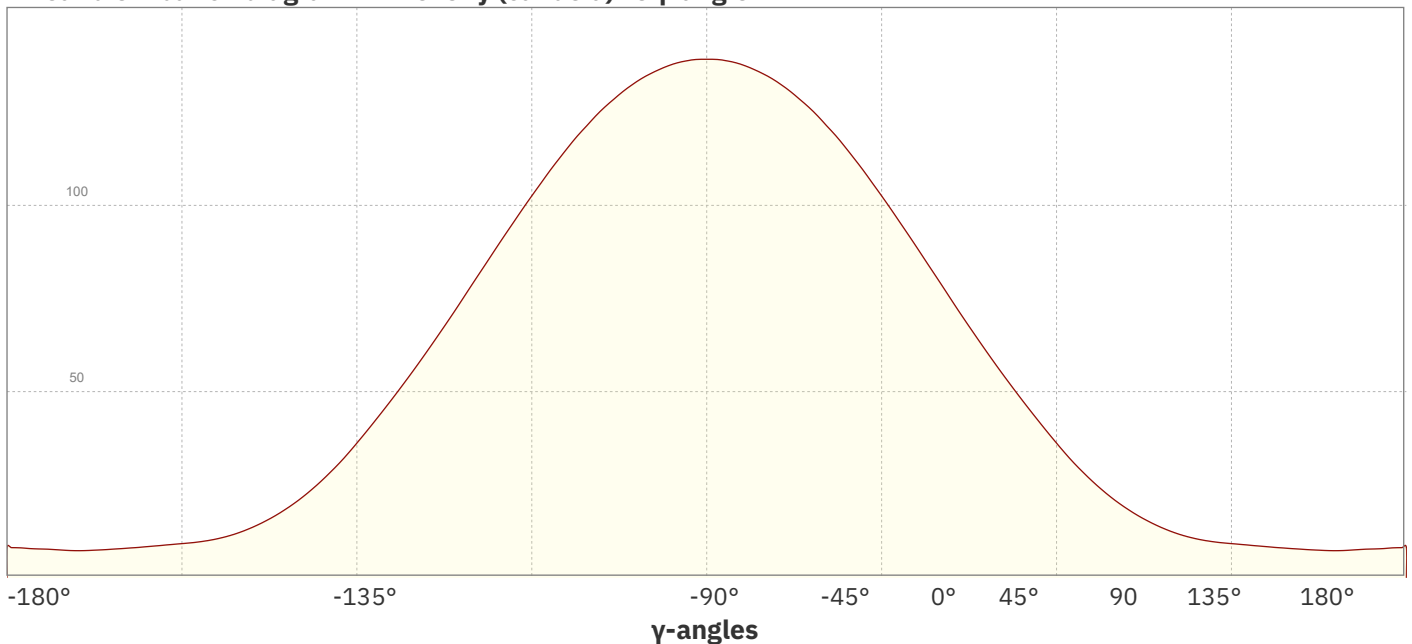


Document revision date: 1-7-2025 Measurement serial: VFR-250224-3232-MS



136-006 Ceiling Light | Ø180mm | 8 Watt | 3-CCT

Beam Details

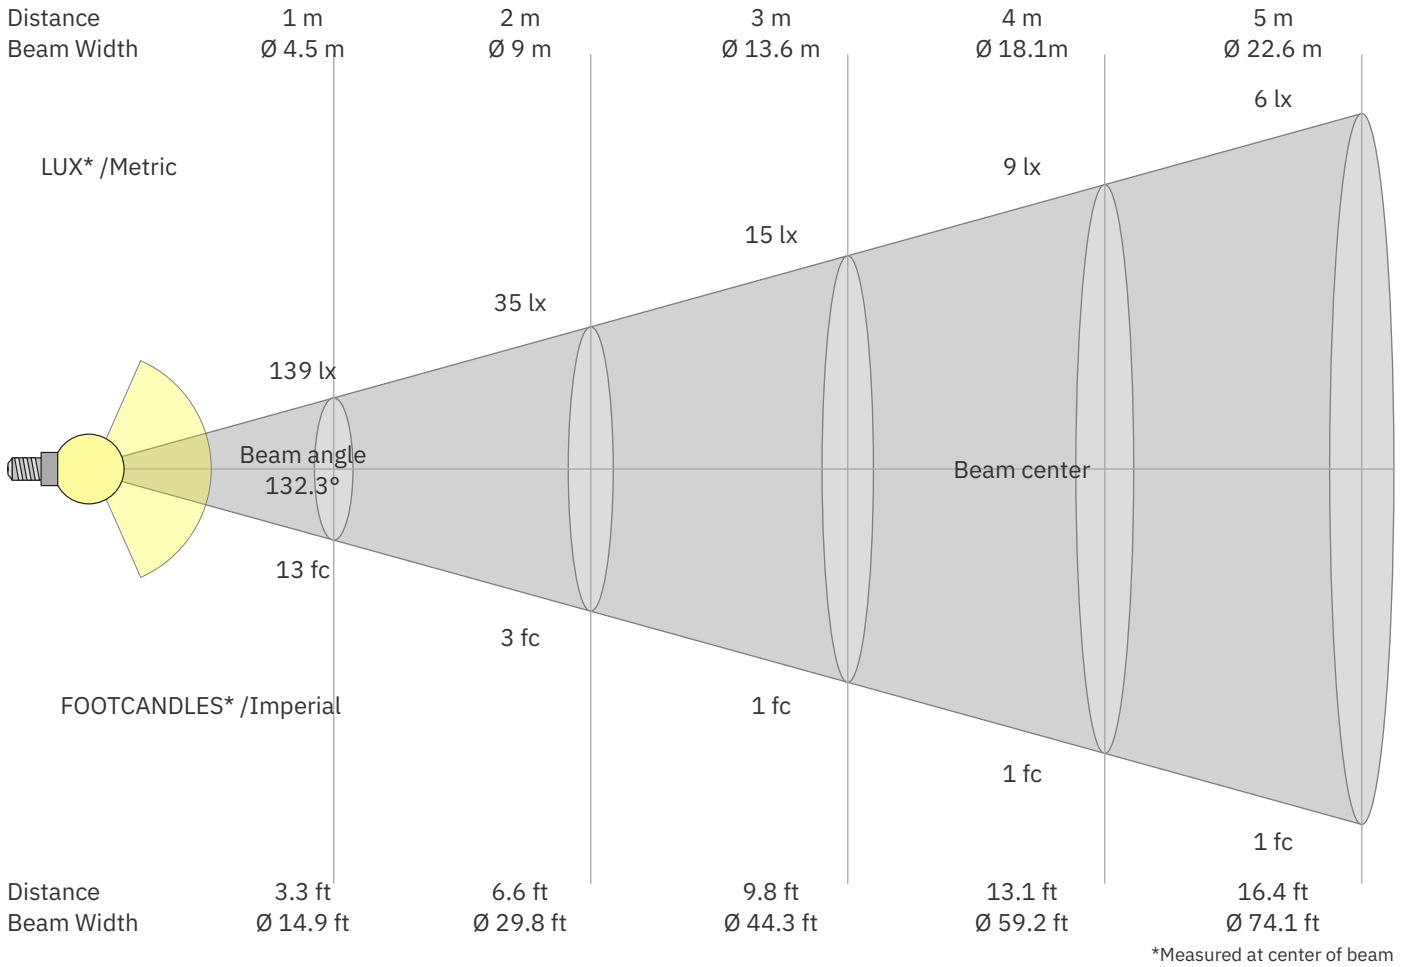

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
139	35	15	9	6	4	3	2	2	1	1	1	1	1	1	1	0	0	0	0	lux
12.9	3.2	1.4	0.8	0.5	0.4	0.3	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0.1	0.1	0	0	0	0	fc

Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
139	138	133	126	115	103	89	75	61	48	36	26	19	14	10	9	8	8	7	8	cd
100%	99%	96%	90%	83%	74%	64%	54%	44%	34%	26%	19%	13%	10%	8%	7%	6%	6%	5%	6%	of 0°val

Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
139	138	133	126	115	103	89	75	61	48	36	26	19	14	10	9	8	8	7	8	cd
100%	99%	96%	90%	83%	74%	64%	54%	44%	34%	26%	19%	13%	10%	8%	7%	6%	6%	5%	6%	of 0°val

Intensities in 180° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
139	138	133	126	115	103	89	75	61	48	36	26	19	14	10	9	8	8	7	8	cd
100%	99%	96%	90%	83%	74%	64%	54%	44%	34%	26%	19%	13%	10%	8%	7%	6%	6%	5%	6%	of 0°val

Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°	γ
139	138	133	126	115	103	89	75	61	48	36	26	19	14	10	9	8	8	7	8	cd
100%	99%	96%	90%	83%	74%	64%	54%	44%	34%	26%	19%	13%	10%	8%	7%	6%	6%	5%	6%	of 0°val

Document revision date: 1-7-2025 Measurement serial: VFR-250224-3232-MS





136-006 Ceiling Light | Ø180mm | 8 Watt | 3-CCT

Light Planning – UGR table

Uncorrected, comprehensive UGR table according to CIE 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	15.8	17.0	16.3	17.6	18.1	15.8	17.0	16.3	17.6	18.1
	3H	17.6	18.8	18.3	19.4	19.9	17.6	18.8	18.3	19.4	19.9
	4H	18.6	19.7	19.2	20.2	20.8	18.6	19.7	19.2	20.2	20.8
	6H	19.5	20.5	20.0	21.0	21.7	19.5	20.5	20.0	21.0	21.7
	8H	19.9	20.9	20.5	21.5	22.1	19.9	20.9	20.5	21.5	22.1
	12H	20.3	21.3	20.9	21.8	22.5	20.3	21.3	20.9	21.8	22.5
4H	2H	16.5	17.6	17.1	18.2	18.7	16.5	17.6	17.1	18.2	18.7
	3H	18.6	19.6	19.2	20.2	20.9	18.6	19.6	19.2	20.2	20.9
	4H	19.6	20.7	20.3	21.2	21.9	19.6	20.7	20.3	21.2	21.9
	6H	20.7	21.5	21.3	22.1	22.8	20.7	21.5	21.3	22.1	22.8
	8H	21.2	21.9	21.8	22.5	23.2	21.2	21.9	21.8	22.5	23.2
	12H	21.6	22.3	22.3	23.0	23.7	21.6	22.3	22.3	23.0	23.7
8H	4H	20.0	20.8	20.7	21.4	22.1	20.0	20.8	20.7	21.4	22.1
	6H	21.3	21.9	22.0	22.6	23.4	21.3	21.9	22.0	22.6	23.4
	8H	22.0	22.5	22.7	23.2	24.1	22.0	22.5	22.7	23.2	24.1
	12H	22.6	23.1	23.4	23.8	24.6	22.6	23.1	23.4	23.8	24.6
12H	4H	20.1	20.7	20.8	21.4	22.1	20.1	20.7	20.8	21.4	22.1
	6H	21.5	22.0	22.2	22.7	23.6	21.5	22.0	22.2	22.7	23.6
	8H	22.2	22.7	23.0	23.4	24.2	22.2	22.7	23.0	23.4	24.2

Variations with the observer position for the luminaire spacings. S:

S = 1.0H	0.1 / -0.1	0.1 / -0.1
S = 1.5H	0.1 / -0.1	0.1 / -0.1
S = 2.0H	0.2 / -0.2	0.2 / -0.2

Coefficients of Utilization

Ceiling reflectance	80	70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	0	
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0	
RCR (RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumen delivered to the task surface																
0	115	115	115	115	111	111	111	111	102	102	94	94	94	87	87	84
1	102	96	91	86	98	92	87	83	85	81	77	78	75	72	72	64
2	92	82	74	68	87	79	72	66	73	67	62	67	62	58	62	51
3	83	71	62	55	79	68	60	53	63	56	50	58	52	48	54	42
4	76	63	53	46	72	60	51	45	56	48	42	51	45	40	47	35
5	69	56	46	39	66	53	45	38	49	42	36	46	39	34	42	30
6	64	50	40	34	61	48	39	33	44	37	31	41	35	30	38	26
7	59	45	36	29	56	43	35	29	40	33	27	37	31	26	35	23
8	55	41	32	26	52	39	31	25	37	30	24	34	28	23	32	20
9	51	37	29	23	49	36	28	23	34	27	22	32	25	21	29	18
10	48	34	26	21	46	33	26	20	31	24	20	29	23	19	27	16