Technical data sheet

Galvanised steel flat conductor for earth

Item number: 5019342



- Can be used as a conductor according to DIN EN 62561-2 (VDE 0185-561-2)
- Meets the requirements of VDE 0185-305 (IEC 62305)
- Zinc coating: ≥ 500 g/m² (approx. 70 µm in mean value)
- For lightning protection, earthing systems and ring equipotential bonding

St	Steel
FT	Hot-dip galvanised

Master data


Item number	5019342
Type	5052 DIN 25X3
Description 1	Steel strip
Description 2	50 kg ring
Manufacturer	OBO
Dimension	25x3mm
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	84
Unit of quantity	Metre
Weight	59.7 kg
Weight unit	kg/100 m

Technical data sheet

Galvanised steel flat conductor for earth

Item number: 5019342

Dimensions

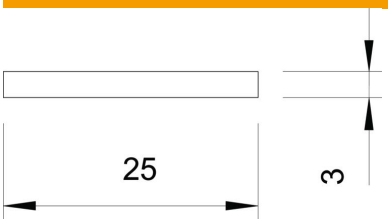

Width	25 mm
Height	3 mm
Dimension B	25 mm
Dimension H	3 mm

Technical data

Nomal ring (approx. kg)	50
Nomal ring (approx. m)	84
Length tolerance ±	5 %
Cross-section	75 mm²
ROHS-conformant	yes