



## Features

- Compact, energy efficient and exceptional value LED GU10 lamp Same shape and size as halogen GU10 lamp Compact Cluster SMD technology enabling high efficiency with halogen look Reduced visible heat sink from the front Available in 36 degree beam angle High lumen efficacy 15,000 hours average rated life 3 years warranty



## Product Overview

Product name	RefLED ES50 V6 610LM 840 36 SL5
Technology	LED
Watt (Rated) (W)	7
Cap/Base	GU10
Fixture rating	Open
General application	Hospitality, Museums & Galleries, Residential & Consumer
ETIM Class	EC001959
Correlated colour temperature (k)	4000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	6
Colour Variation Initial (SDCM)	6
Beam Angle (°)	36
Photobiological Risk Group	RG1
Wattage (W)	7
Power consumption (W)	7
Dimmable	No

## RefLED ES50 V6 610LM 840 36 SL5 0029186

Average life (Nominal) (h)	15000
Product EAN number	5410288291864
Warranty	3 years
Useful luminous flux (#use)	610

### Technical drawings

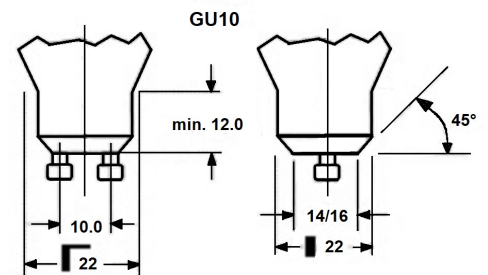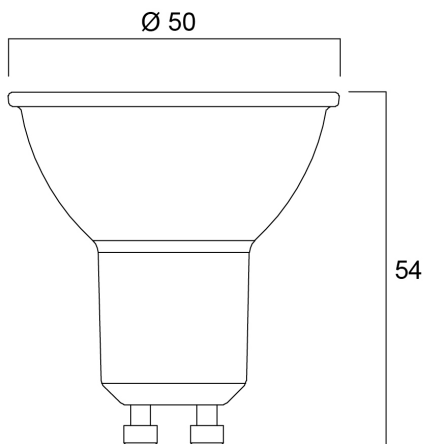

### Data table

#### GENERAL DATA

Product name	RefLED ES50 V6 610LM 840 36 SL5
Technology	LED
Watt (Rated) (W)	7
Cap/Base	GU10
Fixture rating	Open
General application	Hospitality, Museums & Galleries, Residential & Consumer
Operating temperature range (°C)	-20°C...+40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959

## RefLED ES50 V6 610LM 840 36 SL5 0029186

Warranty	3 years
----------	---------

### OPTICAL DATA

Useful luminous flux (#use)	610
Correlated colour temperature (k)	4000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Colour Consistency (SDCM)	6
Luminous Intensity (cd)	1350
Beam Angle (°)	36
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

### ELECTRICAL DATA

Power consumption (W)	7
Wattage (W)	7
Equivalent watt (W)	85
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
No. Of switching cycles before premature failures	>50000
Dimmable	No
Inrush Current (A)	6.0
Inrush Duration (µs)	244
Lamp Energy Label (class)	F
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	147
Max. products per 16A B Breaker	88

### LIFETIME DATA

Lifespan L70 B50	15000
------------------	-------

## RefLED ES50 V6 610LM 840 36 SL5 0029186

Average life (Nominal) (h)	15000
Average life (Rated) (h)	15000

### PHYSICAL DATA

Nominal Product Height (mm)	54
Nominal Product Diameter (mm)	50
Weight (kg)	0.105

### PACKAGING

Product EAN number	5410288291864
Packaging single length / height (cm)	8.2
Packaging single width (cm)	19.5
Packaging single depth (cm)	5.0
DUN14 (inner)	15410288291861
Units per outer package	6
Packaging outer length / height (cm)	9.6
Packaging outer width (cm)	20.8
Packaging outer depth (cm)	32.5

### SAFETY DATA

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

# SYLVANIA

RefLED ES50 V6 610LM 840 36 SL5  
0029186

## Energy label



0029186



**7**  
kWh/1000h



2019/2015



0029186



**7**  
kWh/1000h



2019/2015

Light your world