


Start Surface IP66 Ø350mm DALI
START SURFACE IP66 1500LM 840 IK10 DALI BLK
0049248


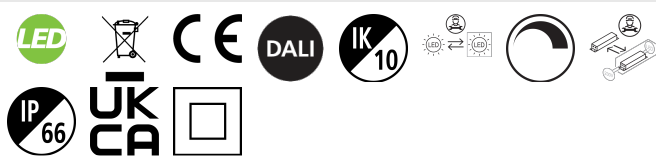


PRODUCT OVERVIEW

Product name	START SURFACE IP66 1500LM 840 IK10 DALI BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
Warranty	5 years
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	94
LOR (%)	100
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	16
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492483

PHOTOMETRY

Start Surface IP66 Ø350mm DALI
START SURFACE IP66 1500LM 840 IK10 DALI BLK
0049248



TECHNICAL DRAWINGS

