

## Start Surface IP66 Ø350mm DALI

START SURFACE IP66 1500LM 840 IK10 DALI EM3 WHT  
0049250




### PRODUCT OVERVIEW

Product name	START SURFACE IP66 1500LM 840 IK10 DALI EM3 WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
Warranty	5 years
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	89
LOR (%)	100
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492506

### PHOTOMETRY

**Start Surface IP66 Ø350mm DALI**  
*START SURFACE IP66 1500LM 840 IK10 DALI EM3 WHT*  
**0049250**

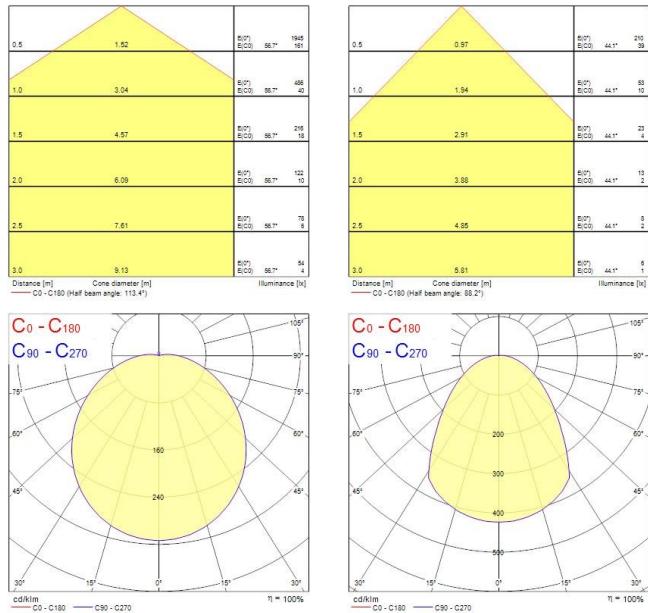

## TECHNICAL DRAWINGS

