



Features

• Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured black finishing colour Light color temperature: 4000K, natural white System power: 31W, Fixture lumen output: 3625lm, efficacy: 117lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, DALI dimmable driver, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.81mmx150mm 5 years warranty


Product Overview

Product name	PIXO MEDIUM 3625LM 940 NB MB WB DALI BLACK
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries, Retail, Office, Residential & Consumer
ETIM Class	EC001744
Fixture luminous flux (lm)	3625
Luminaire efficacy (lm/W)	117
Correlated colour temperature (k)	4000

PIXO MEDIUM 3625LM 940 NB MB WB DALI BLACK
0004563

Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	4
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	31
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK03
Product EAN number	5410288045634
Warranty	5 years
Dimming method	DALI-2
Useful luminous flux (#use)	3625

Photometry

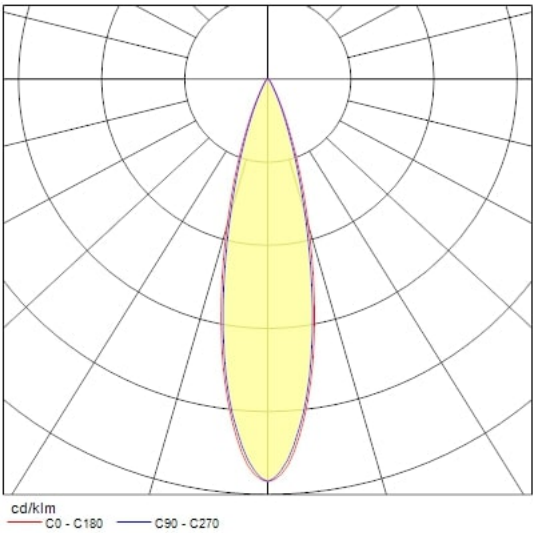

Technical drawings

