

START SURFACE IP66 1500LM 840 IK10 DALI EM3 BLK
0049252



Features

- LED exterior surface mounted luminaire, 350mm diameter, 1500lm as max. lumen output, 15W max. power consumption, 100lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 60,000 hours (L70), black housing, vandal resistant. DALI and DALI 2 dimming compatibility. Integrated emergency, 3 hours, supplied with anti-theft screws


Product Overview

Product name	START SURFACE IP66 1500LM 840 IK10 DALI EM3 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	89
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9011

START SURFACE IP66 1500LM 840 IK10 DALI EM3 BLK
0049252

IP rating	IP66
IK rating	IK10
Product EAN number	5410288492520
Warranty	5 years
Colour Code	840

Photometry

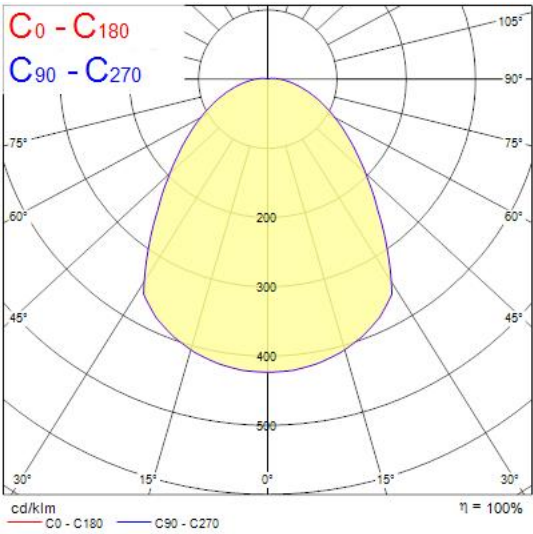

Technical drawings

