

START SURFACE IP66 2400LM 830 IK10 DALI WHT
0049253



Features

- LED exterior surface mounted luminaire, 350mm diameter, 2400lm as max. lumen output, 26W max. power consumption, 92lm/W efficacy, 3000K color temperature, CRI80, IP66, IK10, 60,000 hours (L70), white housing, vandal resistant. DALI and DALI 2 dimming compatibility, supplied with anti-theft screws


Product Overview

Product name	START SURFACE IP66 2400LM 830 IK10 DALI WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
E-number FI	4579491
Fixture luminous flux (lm)	2400
Luminaire efficacy (lm/W)	92
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	26
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003

START SURFACE IP66 2400LM 830 IK10 DALI WHT
0049253

IP rating	IP66
IK rating	IK10
Product EAN number	5410288492537
Warranty	5 years
Colour Code	830

Photometry

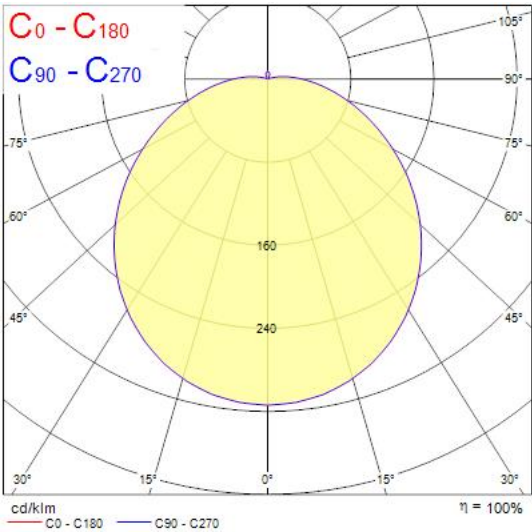

Technical drawings

