

|                           |                           |                                                                                     |
|---------------------------|---------------------------|-------------------------------------------------------------------------------------|
| 19121000                  | <b>DATA SHEET</b>         |  |
| Valid from:<br>17.06.2025 | <b>EPIC® H-B 24 TG/TS</b> |                                                                                     |

## Description

- The standard for housings. Large selection of different inserts.
- Easy-to-grip, user-friendly design makes it easy to plug and unplug the connector.



## General Characteristics

|                              |                       |
|------------------------------|-----------------------|
| Series                       | H-B 24                |
| Locking                      | pins for double lever |
| Cable entry                  | top / side            |
| Protection (DIN EN 60529)    | IP 65 (latched)       |
| Protection (NEMA 250, UL50E) | 4, 12 (latched)       |
| Temperature Range            | -40°C to +125°C       |

## Materials and Surfaces

|         |                                      |
|---------|--------------------------------------|
| Housing | aluminium alloy, powder-coated, grey |
|---------|--------------------------------------|

## Approvals

|                            |        |
|----------------------------|--------|
| UL-Approval, E-File-Number | E75770 |
|----------------------------|--------|

## Standard

|                 |           |
|-----------------|-----------|
| Safety Standard | IEC 61984 |
|-----------------|-----------|


## Versions

| Article number | Article description     | Thread M    | Cable entry |
|----------------|-------------------------|-------------|-------------|
| 19121000       | EPIC® H-B 24 TG M25     | M25x1,5     | top         |
| 19111000       | EPIC® H-B 24 TG M32     | M32x1,5     | top         |
| 19111500       | EPIC® H-B 24 TG M40     | M40x1,5     | top         |
| 44422019       | EPIC® H-B 24 TG 2 x M25 | 2 x M25x1,5 | top         |
| 44422020       | EPIC® H-B 24 TG 2 x M32 | 2 x M32x1,5 | top         |
| 19113000       | EPIC® H-B 24 TS M25     | M25x1,5     | side        |
| 19123000       | EPIC® H-B 24 TS M32     | M32x1,5     | side        |

|                                                   |                                       |             |
|---------------------------------------------------|---------------------------------------|-------------|
| Creator: VACH1/BU EPIC<br>Released: TODV1/BU EPIC | Document: DB19121000EN<br>Version: 03 | Page 1 of 2 |
|---------------------------------------------------|---------------------------------------|-------------|

|                           |                           |                                                                                     |
|---------------------------|---------------------------|-------------------------------------------------------------------------------------|
| 19121000                  | <b>DATA SHEET</b>         |  |
| Valid from:<br>17.06.2025 | <b>EPIC® H-B 24 TG/TS</b> |                                                                                     |

## Technical Drawings

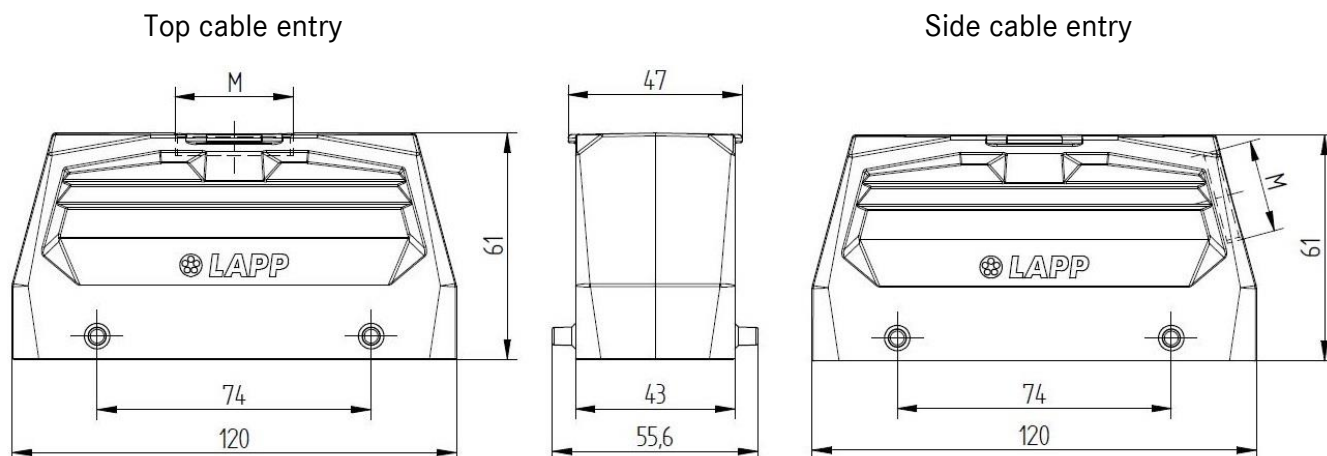

Industrial machinery and plant engineering



Mechanical resistance



Robust



Waterproof



Automation

### Info

Universal, robust metal housings size H-B 24

### Application range

Plant engineering, Light & sound technology, Plastics industry

### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

|                                                   |                                       |             |
|---------------------------------------------------|---------------------------------------|-------------|
| Creator: VACH1/BU EPIC<br>Released: TODV1/BU EPIC | Document: DB19121000EN<br>Version: 03 | Page 2 of 2 |
|---------------------------------------------------|---------------------------------------|-------------|