



Features

• Simple and slick integral design with no driver box and without any visible screws Improved thermal resistance with in-track driver, ideal for retail applications Extremely precise light beams due to the high-quality lenses Die-cast aluminium body, Beam angle: 36°, additional lenses 24° and 54° beam angle included in the packaging, Textured white finishing colour Light color temperature: 3000K, warm white System power: 40W, Fixture lumen output: 5050lm, efficacy: 126lm/W, Ra90 typical, LED chromacity: 3 step MacAdam ellipse LED source (SDCM3), IR/UV free light source without heat radiation Operating voltage 220-240V / 50-60Hz, DALI dimmable driver, ultra low LED flickering rate (5% or less) Suitable for installation on 3-circuit tracks, please check compatibility list on the instruction sheet. Compatible with OneTrack Electrical protection: Class II. Degree of protection: IP20, suitable for indoor environment only Horizontal rotation: 345°, vertical tilt: 90° Nominal product dimensions: D.91mmx150mm 5 years warranty


Product Overview

|                                   |                                                             |
|-----------------------------------|-------------------------------------------------------------|
| Product name                      | PIXO LARGE 5050LM 930 NB MB WB DALI WHITE                   |
| Technology                        | LED                                                         |
| Cap/Base                          | N/A                                                         |
| Housing                           | Aluminium                                                   |
| Mount                             | Track mounting                                              |
| General application               | Museums & Galleries, Retail, Office, Residential & Consumer |
| ETIM Class                        | EC001744                                                    |
| Fixture luminous flux (lm)        | 5050                                                        |
| Luminaire efficacy (lm/W)         | 126                                                         |
| Correlated colour temperature (k) | 3000                                                        |

PIXO LARGE 5050LM 930 NB MB WB DALI WHITE  
0004564

|                                 |                             |
|---------------------------------|-----------------------------|
| Light colour                    | Neutral White               |
| CRI (Ra)                        | 90                          |
| Colour Variation Initial (SDCM) | 4                           |
| Beam Angle (°)                  | 36                          |
| Photobiological Risk Group      | RG1                         |
| Total power consumption (W)     | 40                          |
| Electrical protection           | Class II                    |
| Control gear type               | LED driver constant current |
| Dimmable                        | Yes                         |
| Housing colour                  | White                       |
| IP rating                       | IP20                        |
| IK rating                       | IK03                        |
| Product EAN number              | 5410288045641               |
| Warranty                        | 5 years                     |
| Dimming method                  | DALI-2                      |
| Useful luminous flux (#use)     | 5050                        |

Photometry

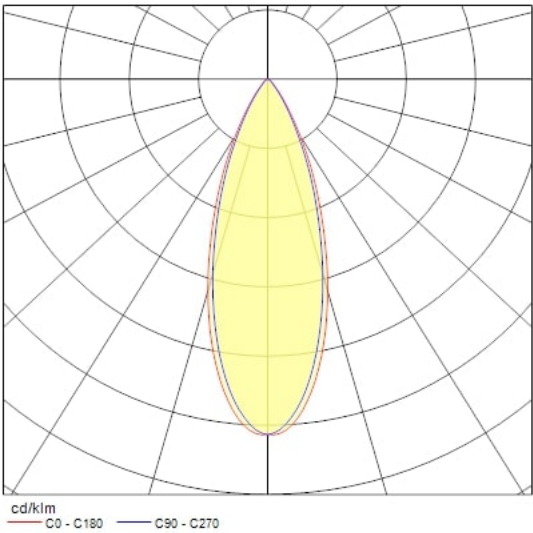

Technical drawings

