


Start Surface IP66 Ø350mm DALI
START SURFACE IP66 2500LM 840 IK10 DALI BLK
0049256

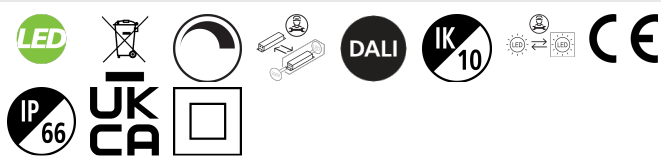


PRODUCT OVERVIEW

Product name	START SURFACE IP66 2500LM 840 IK10 DALI BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
E-number FI	4579494
Warranty	5 years
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	26
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492568

PHOTOMETRY

Start Surface IP66 Ø350mm DALI
START SURFACE IP66 2500LM 840 IK10 DALI BLK
0049256

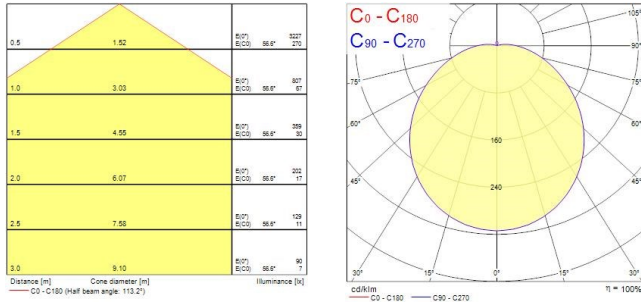

TECHNICAL DRAWINGS

