



Features

- LED exterior surface mounted luminaire, 350mm diameter, 2500lm as max. lumen output, 26W max. power consumption, 96lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 60,000 hours (L70), black housing, vandal resistant. DALI and DALI 2 dimming compatibility, supplied with anti-theft screws

Product Overview

Product name	START SURFACE IP66 2500LM 840 IK10 DALI BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
Environment	Indoor, Outdoor
E-number FI	4579494
Fixture luminous flux (lm)	2500
Luminaire efficacy (lm/W)	96
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Glare control	< 26
Photobiological Risk Group	RG0
Total power consumption (W)	26
Electrical protection	Class II
Control gear type	LED driver constant current
Control gear mounting	Integrated
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9011

Light your world

START SURFACE IP66 2500LM 840 IK10 DALI BLK 0049256

IP rating

IP66

IK rating

IK10

Product EAN number

5410288492568


Warranty

5 years

Colour Code

840

Photometry

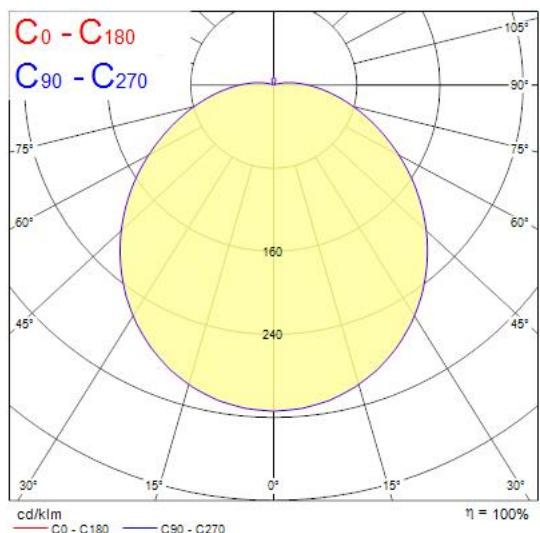

Technical drawings

