

Start Surface IP66 Ø300mm Sensor Dim
START SURFACE IP66 1100LM 840 IK10 MW SENS WHT
0049291



Product features

- Sensor Dim LED exterior surface mounted luminaire, 1100lm, 12W power consumption, 92lm/W efficacy, 4000K color temperature, CRI80, IP66, IK10, 50,000 hours (L70), white housing, vandal resistant, supplied with anti-theft screws




PRODUCT OVERVIEW

Product name	START SURFACE IP66 1100LM 840 IK10 MW SENS WHT
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Environment	Indoor, Outdoor
General application	Hospitality
ETIM Class	EC002892
E-number FI	4274705
E-number SE	7505135
Warranty	5 years
Useful luminous flux (Fuse)	1100
Fixture luminous flux (lm)	1100
Luminaire efficacy (lm/W)	92
Correlated colour temperature (k)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	120
Beam Angle (°)	110
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Dimmable	Yes
LED Flickering Rate	High (>40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP66
IK rating	IK10
Product EAN number	5410288492919

PHOTOMETRY

Start Surface IP66 Ø300mm Sensor Dim
START SURFACE IP66 1100LM 840 IK10 MW SENS WHT
0049291

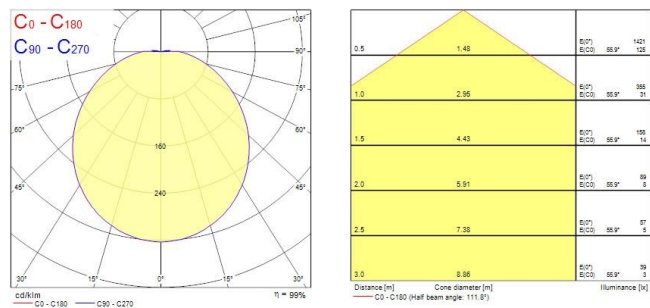

TECHNICAL DRAWINGS

