


16PKG-2616: Reducing coupling Gas 26x16

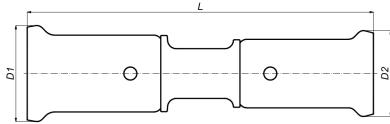

Commercial information

The PVDF press fittings for gas differ in only one significant technical aspect compared to press fittings for sanitary and heating applications. The fittings have a special O-ring that is made from the HNBR and is resistant to gas. To make this difference visible, every pressure sleeve has a yellow band. The fittings for gas should never be used for sanitary applications or heating applications. Similarly, fittings for gas should only be used in combination with the yellow Henco multilayer pipe for gas.

The Henco system for gas is only permitted in countries where a gas quality mark has been granted.

PVDF offers the user a unique combination of properties:

- Highly resistant to pressure and temperature
- Excellent mechanical strength
- Extreme flexibility: bending up to 10° is possible
- Highly resistant to chemicals and corrosion
- Embedding is possible without extra protection

Basic unit dimensions

| | |
|------------|----------|
| Height | 33 mm |
| Length | 84 mm |
| Width | 33 mm |
| Net weight | 0.049 kg |

Certificates

GASTEC, TSU, ROST

Applications

Gas

Solutions

Building installations, Industry, Oil & gas, Utility, Shipbuilding

Technical characteristics

| | | | |
|------------------------------------|--|----------------------------------|------------------------|
| Material connection 1 | Polyvinylidene fluoride (PVDF) | Bend radius | 0 Millimetre |
| Material quality connection 1 | Polyvinylidene fluoride (PVDF) (expired) | Outer pipe diameter connection 1 | 26 Millimetre |
| Surface protection connection 1 | Untreated | Wall thickness, connection 1 | 0.95 Millimetre |
| Surface treatment connection 1 | Untreated | Outer pipe diameter connection 2 | 16 Millimetre |
| Material connection 2 | Polyvinylidene fluoride (PVDF) | Wall thickness, connection 2 | 0.7 Millimetre |
| Material quality connection 2 | Polyvinylidene fluoride (PVDF) (expired) | Zeta value | 39.9 |
| Surface protection connection 2 | Untreated | Length | 84 Millimetre |
| Surface treatment connection 2 | Untreated | Length of connection 1 | 42 Millimetre |
| Shape | Straight | Working length connection 1 | 15 Millimetre |
| Reducing | ✓ | Length of connection 2 | 42 Millimetre |
| Eccentric | ✗ | Working length connection 2 | 15 Millimetre |
| System specific | ✓ | Wrench width | 0 Millimetre |
| Connection 1 | Press sleeve | Wrench width union nut | 0 Millimetre |
| Contour code connection 1 | TH | Medium temperature (continuous) | -20 60 Degrees celsius |
| Connection 2 | Press sleeve | Max. operating pressure at 20 °C | 10 Bar |
| Contour code connection 2 | TH | Standard Dimension Ratio (SDR) | 0 |
| Main colour fitting | Black | | |
| Material sealing | Hydrogenated acrylonitrile butadiene rubber (HNBR) | | |
| With buffer stud | ✓ | | |
| High tensile strength | ✗ | | |
| Gastec QA | ✓ | | |
| With thermal insulation | ✗ | | |
| Ring stiffness class | Other | | |
| With sealing rings/gaskets | ✓ | | |
| Capped | ✗ | | |
| With drain valve | ✗ | | |
| With de-aerator | ✗ | | |
| FM quality mark | ✗ | | |
| LPCB quality mark | ✗ | | |
| ULC quality mark | ✗ | | |
| UL quality mark | ✗ | | |
| DIN-CERTCO certificate | ✗ | | |
| VdS quality mark | ✗ | | |
| With approval for TÜV | ✗ | | |
| DVGW quality mark for gas | ✗ | | |
| DVGW quality mark for water | ✗ | | |
| KIWA certified | ✗ | | |
| Gastec QA mark | ✓ | | |
| KOMO certified | ✗ | | |
| Type approval according to BBR/EKS | ✗ | | |