

Muro Surface with photocell and emergency unit

Muro Surface IP65 1700-3250lm 840 PH E3 Grey

0049945



Product features

- Muro Surface is a wall mounted fixture for exterior lighting applications with 3 hours combined non-maintained, automatic self test emergency unit. Comes with aluminium housing in RAL7016 anthracite grey colour, frosted PC diffuser, IP65, IK10, Class I, 4000K, non-dimmable multipower driver with 5 settings, 1700 / 1900 / 2750 / 3150 / 3250 lm, 16 / 18 / 26 / 29 / 30 W, up to 109 lm/W total system efficacy, switchable built in Mini photocell, CRI80, Asymmetrical beam, 119.000 hrs L70B50 lifespan, 304 x 305 x 155 mm (L x W x D) dimensions, 4.32 kg weight.




PRODUCT OVERVIEW

Product name	Muro Surface IP65 1700-3250lm 840 PH E3 Grey
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted
General application	Hospitality, Logistics & Industry, Museums & Galleries, Office
ETIM Class	EC002892
Warranty	5 years
Useful luminous flux (Fuse)	3250
Fixture luminous flux (lm)	3250
Luminous flux (lm)	3250
Luminaire efficacy (lm/W)	108
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	165
Total power consumption (W)	30
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 7016 - Anthracite
IP rating	IP65
IK rating	IK10
Product EAN number	5410288499451

PHOTOMETRY

Muro Surface with photocell and emergency unit

Muro Surface IP65 1700-3250lm 840 PH E3 Grey
0049945

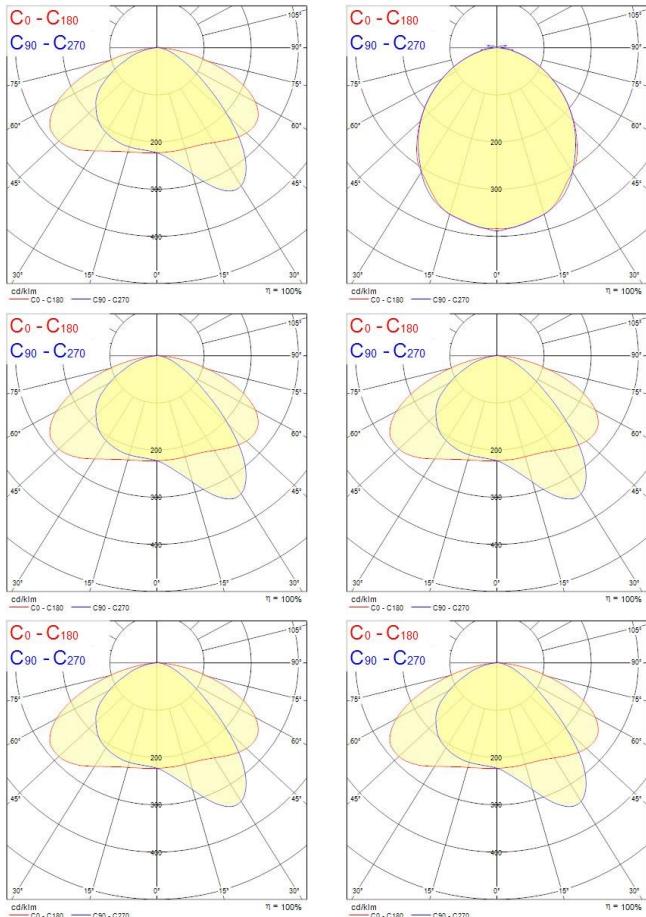

TECHNICAL DRAWINGS

