

# Product End of Life Instructions

## PowerPact H-frame Molded Case Circuit Breaker with Thermal-magnetic Trip Unit





Potential disassembly risks

**⚠ WARNING**

**HAZARD OF ELECTRIC SHOCK, EXPLOSION, AND FIRE**

The Ethernet cable and Ethernet knockout cable that come with the Schneider Energy Monitor package are 600V-rated. If additional Ethernet cables are required they must be Power over Ethernet (PoE) CAT5E 600 V-rated cable (SEMONITORMTM or similar).

**Failure to follow these instructions can result in death, serious injury, or equipment damage.**

**⚠ WARNING**


**HAZARD OF ARC FLASH OR FIRE**

- Disconnect battery terminals before disassembly
- Avoid any electrical connection between the terminals

**Failure to follow these instructions can result in death or serious injury.**



End of Life Instructions

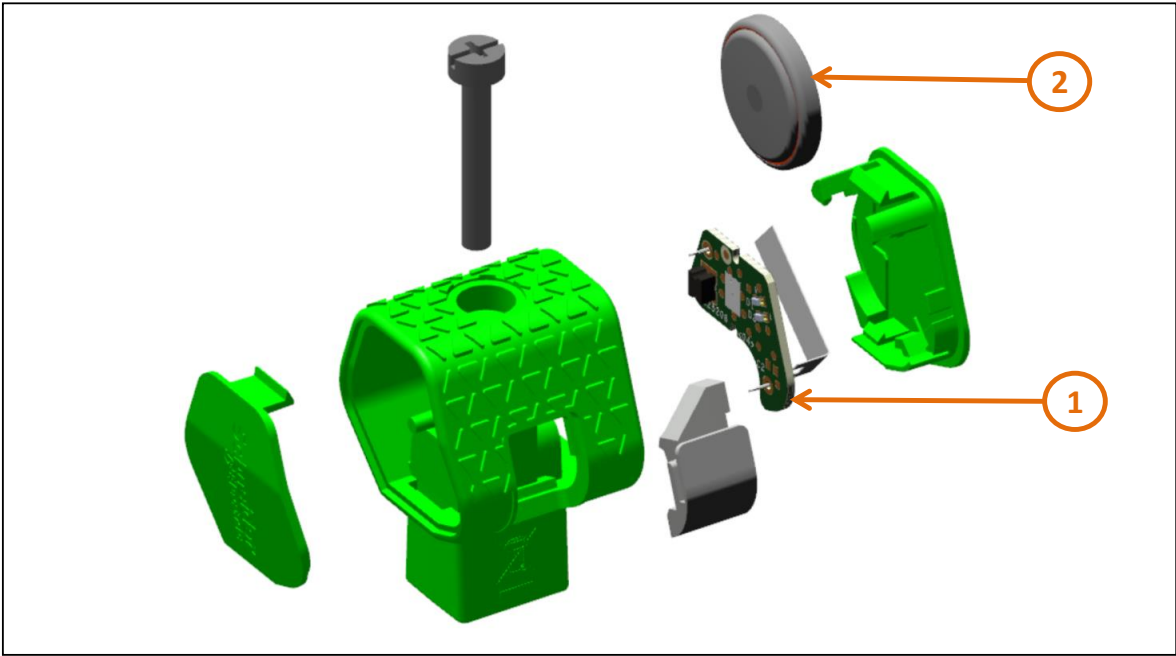

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	PCBA	2.52	Electronic Board
To be depolluted	2	Battery	2	Lithium Manganese Dioxide



## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	SQUARE D
Product function	This product with thermal-magnetic Trip Unit is designed to protect electrical systems from damage caused by overloads and short circuits. The product is packed in a polyethylene layer, placed in cardboard box and labelled.
Product reference	HDL36150
Total representative product mass	1518 g
Representative product dimensions	163 mm x 104mm x 111 mm
Accessories	No
Date of information release	05-2025

## Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	No	
Recyclability potential	<b>45%</b>	The recyclability rate was calculated from the recycling rates of each material making up the product based on REECYLAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the EIME database and the related PSR was taken. If no data was found a conservative assumption was used (0% recyclability).

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.se.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92500 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 928 298 512 €

[www.se.com](http://www.se.com)

ENVEOLI2206027\_V2

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

05-2025