



Features

- LED retrofit replacement for halogen G4 low voltage capsules
- Compact design
- Omni-directional light distribution
- 12V AC/DCHigh lumen efficacy: 108lm
- Non-dimmable
- Suitable for chandeliers, interior display, shop windows, decorative and general lighting applications


Product Overview

| | |
|-----------------------------------|-------------------------------------|
| Product name | ToLEDo RT G4 V2 350LM 827 SL |
| Technology | LED |
| Lamp shape | Linear |
| Cap/Base | G4 |
| Lamp finish | Clear |
| Fixture rating | Open |
| General application | Hospitality, Residential & Consumer |
| ETIM Class | EC001959 |
| E-number FI | 4741214 |
| Correlated colour temperature (k) | 2700 |
| Light colour | Homelight |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 6 |
| Beam Angle (°) | 280 |
| Photobiological Risk Group | RG1 |
| Wattage (W) | 3 |
| Power consumption (W) | 3 |
| Control gear type | LED driver constant current |

ToLEDo RT G4 V2 350LM 827 SL 0030792

| | |
|-----------------------------|---------------|
| Dimmable | No |
| Housing colour | Transparent |
| IP rating | IP20 |
| Product EAN number | 5410288307923 |
| Warranty | 3 years |
| Dimming method | N/A |
| Useful luminous flux (#use) | 350 |

Technical drawings

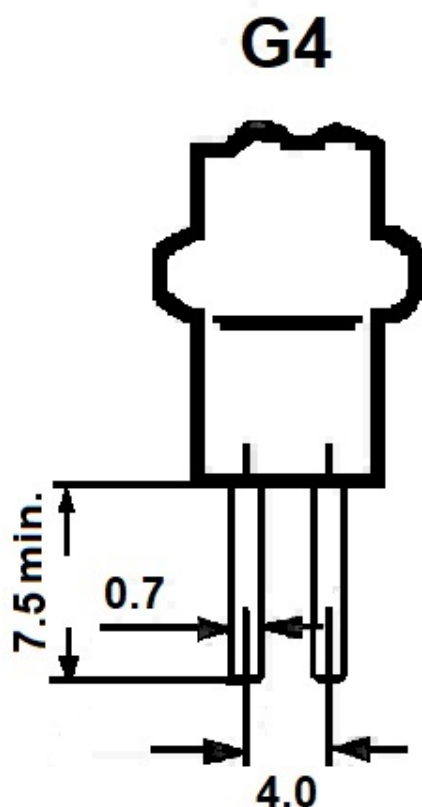

Data table

GENERAL DATA

| | |
|--------------|------------------------------|
| Product name | ToLEDo RT G4 V2 350LM 827 SL |
|--------------|------------------------------|

ToLEDo RT G4 V2 350LM 827 SL
0030792

| | |
|---------------------|-------------------------------------|
| Technology | LED |
| Lamp shape | Linear |
| Cap/Base | G4 |
| Lamp finish | Clear |
| Fixture rating | Open |
| General application | Hospitality, Residential & Consumer |
| ETIM Class | EC001959 |
| E-number FI | 4741214 |
| Warranty | 3 years |

OPTICAL DATA

| | |
|-----------------------------------|-----------|
| Useful luminous flux (#use) | 350 |
| Correlated colour temperature (k) | 2700 |
| Light colour | Homelight |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | 6 |
| Beam Angle (°) | 280 |
| Photobiological Risk Group | RG1 |

ELECTRICAL DATA

| | |
|---|-----------------------------|
| Power consumption (W) | 3 |
| Wattage (W) | 3 |
| Equivalent watt (W) | 30 |
| Current (A) | 0.4 |
| Primary Supply/Product voltage - min (V) | 12 |
| Primary Supply/Product voltage - max (V) | 12 |
| Control gear required | Yes |
| Control gear type | LED driver constant current |
| No. Of switching cycles before premature failures | >50000 |
| Dimmable | No |
| Dimming method | N/A |
| Inrush Current (A) | 6.56 |
| Inrush Duration (µs) | 7100 |

ToLEDo RT G4 V2 350LM 827 SL 0030792

| | |
|---------------------------|----------|
| Lamp Energy Label (class) | F |
| Nominal Frequency (Hz) | 50/60/HF |

LIFETIME DATA

| | |
|------------------|-------|
| Lifespan L70 B50 | 15000 |
|------------------|-------|

PHYSICAL DATA

| | |
|-------------------------------|-------------|
| Housing colour | Transparent |
| IP rating | IP20 |
| Nominal Product Height (mm) | 49 |
| Nominal Product Diameter (mm) | 18 |
| Weight (kg) | 0.011 |

PACKAGING

| | |
|---------------------------------------|----------------|
| Product EAN number | 5410288307923 |
| Packaging single length / height (cm) | 6.1 |
| Packaging single width (cm) | 5.1 |
| Packaging single depth (cm) | 8.2 |
| DUN14 (inner) | 15410288307920 |
| Units per outer package | 6 |
| Packaging outer length / height (cm) | 19.5 |
| Packaging outer width (cm) | 11.0 |
| Packaging outer depth (cm) | 9.5 |

SAFETY DATA

| | |
|-------------------------------------|--|
| Breakage cleaning instructions | Not applicable |
| Special purpose lamp | No |
| Dry applications use only | Yes |
| Suitable for household illumination | Yes |
| Safety message | Not Suitable for totally enclosed fixtures |

SYLVANIA

ToLEDo RT G4 V2 350LM 827 SL
0030792

Energy label



0030792



3
kWh/1000h



2019/2015



0030792



3
kWh/1000h



2019/2015