



Features

- Insaver Slim is a ceiling recessed LED downlight (IP44 from the front), Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver, 13W; 1500lm; 115lm/W; 3000K; UGR <19 with shallow product depth 60mm. Meets TP(a) requirements.



Product Overview

Product name	Insaver Slim UGR19 175 IP44 1500lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
E-number FI	4276916
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	115
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	NA
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	13
Electrical protection	Class II
Control gear type	LED driver constant current
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL9003

Insaver Slim UGR19 175 IP44 1500lm 830 0030302

IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303024
Warranty	5 years


Photometry

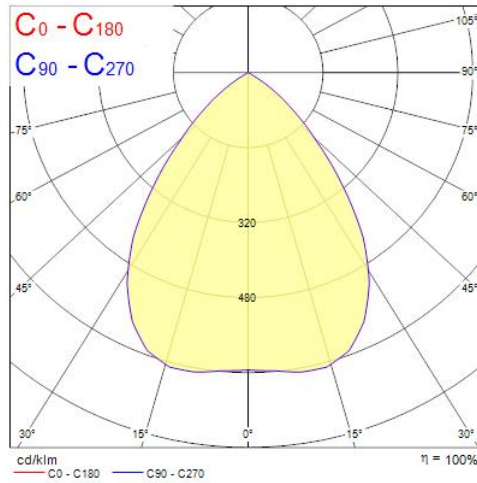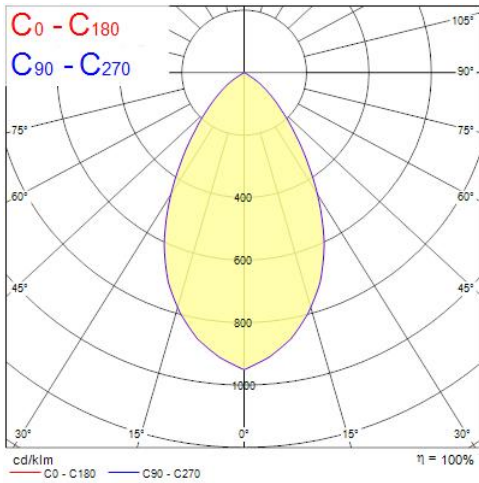

Distance [m]	Cone diameter [m]	E _v (0°)	E _v (C0)	E _v (C0)	Illuminance [lx]
0.5	0.58	E _v (0°)	30.2°	5629	1825
1.0	1.16	E _v (0°)	30.2°	1407	456
1.5	1.75	E _v (0°)	30.2°	625	203
2.0	2.33	E _v (0°)	30.2°	352	114
2.5	2.91	E _v (0°)	30.2°	225	73
3.0	3.49	E _v (0°)	30.2°	156	51

Distance [m] Cone diameter [m] Illuminance [lx]
 — C0 - C180 (Half beam angle: 60.4°)

Technical drawings

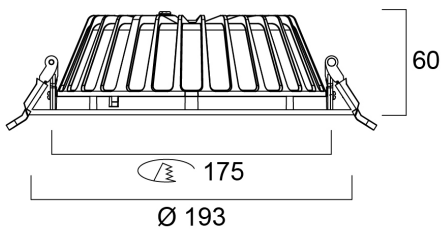

Data table

GENERAL DATA

Product name	Insaver Slim UGR19 175 IP44 1500lm 830
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
Operating temperature range (°C)	-10°C...+40°C
Performance ambient temperature Tq (°C)	40
E-number FI	4276916
Warranty	5 years

OPTICAL DATA

Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	115
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	3
Beam Angle (°)	NA
Glare control	< 19
Photobiological Risk Group	RG1

ELECTRICAL DATA

Total power consumption (W)	13
Lamp power factor	0.9
Electrical protection	Class II
Control gear required	No
Control gear type	LED driver constant current
Drive current (mA)	390
Inrush Current (A)	17.5

Insaver Slim UGR19 175 IP44 1500lm 830 0030302

Inrush Duration (μ s)	188
Glow Wire Test ($^{\circ}$ C)	850
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. products per 10A C Breaker	22
Max. products per 20A B Breaker	25
Connectable conductor cross section - Min (mm^2)	0.7
Connectable conductor cross section - Max (mm^2)	1.7

LIFETIME DATA

Lifespan L70 B50	90000
Lifespan L80 B20	90000
Lifespan L90 B10	39000

PHYSICAL DATA

Housing colour	RAL9003
IP rating	IP44/20
IK rating	IK07
Diffuser finish	Other
Diffuser material	None
Nominal Product Diameter (mm)	193
Weight (kg)	0.55
Recessed Depth (mm)	150

PACKAGING

Single packaging type	Carton
Product EAN number	5410288303024
Packaging single width (cm)	20.5
Packaging single depth (cm)	7.3
DUN14 (outer)	15410288303021

Insaver Slim UGR19 175 IP44 1500lm 830
0030302

Packaging outer length / height (cm)	42.5
--------------------------------------	------

SAFETY DATA

Optimal operating condition (°C)	-10-40
----------------------------------	--------

Special purpose lamp	No
----------------------	----

Dry applications use only	No
---------------------------	----

Suitable for household illumination	No
-------------------------------------	----