

Start Surface IP66 Ø300mm New
START SURFACE IP66 1150LM 830 IK10 BLK
0049926



PRODUCT OVERVIEW

Product name	START SURFACE IP66 1150LM 830 IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor, Outdoor
E-number FI	4579597
Warranty	5 years
Fixture luminous flux (lm)	1150
Luminaire efficacy (lm/W)	96
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	RG0
Total power consumption (W)	12
Electrical protection	Class II
Control gear type	LED driver constant current
Housing colour	RAL 9011 - Graphite black
IP rating	IP66
IK rating	IK10
Product EAN number	5410288499260

DATA TABLE

General data	
Product name	START SURFACE IP66 1150LM 830 IK10 BLK
Technology	LED
Cap/Base	N/A
Housing	PC Polycarbonate
Mount	Ceiling surface mounting, Wall surface mounted
Environment	Indoor, Outdoor
Operating temperature range (°C)	-20°C...+40°C

Start Surface IP66 Ø300mm New START SURFACE IP66 1150LM 830 IK10 BLK 0049926

Performance ambient temperature Tq 25
(°C)

E-number FI 4579597

Warranty 5 years

Optical data

Fixture luminous flux (lm) 1150

Luminaire efficacy (lm/W) 96

Colour temperature (K) 3000

Light colour Warm White

CRI (Ra) 80

Colour Variation Initial (SDCM) SDCM5

Photobiological Risk Group RG0

Electrical data

Total power consumption (W) 12

Primary Supply/Product voltage - min (V) 220

Lamp power factor 0.83

Electrical protection Class II

Control gear type LED driver constant current

Inrush Current (A) 20

Glow Wire Test (°C) 650

Energy Efficiency Class (A->G) of
contained light source E

Nominal Frequency (Hz) 50/60Hz

Max. products per 10A C Breaker 38

Connectable conductor cross section -
Max (mm²) 2.5

Lifetime data

Lifespan L70 B50 90000

Lifespan L80 B50 78000

Physical data

Housing colour RAL 9011 - Graphite black

IP rating IP66

IK rating IK10

Diffuser finish Diffuse

Diffuser material PC Polycarbonate

Nominal Product Diameter (mm) 300

Weight (kg) 0.78

Packaging

Single packaging type Carton

Product EAN number 5410288499260

Packaging single width (cm) 9.9

Packaging single depth (cm) 30.5

DUN14 (outer) 15410288499267


Packaging outer length / height (cm) 61.5

Start Surface IP66 Ø300mm New
START SURFACE IP66 1150LM 830 IK10 BLK
0049926

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

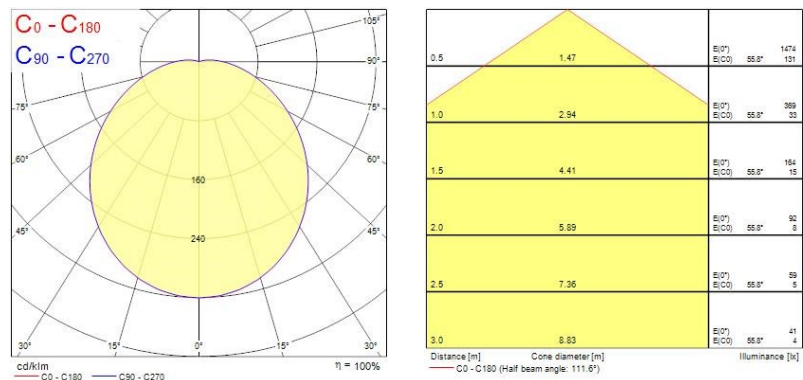

TECHNICAL DRAWINGS

