

ToLEDo Performer T-Series

ToLEDo Performer T85 4500LM 840 E27 SL

0028371



Product features

- Direct retrofit replacement for high-pressure mercury vapor lamps (HPMV)50,000 hours average rated lifetimeUp to 78% energy saving compared to the standard high-pressure mercury vapor lampsMercury-free solutionLower maintenance costHigh lumen efficacyDual operating mode - compatible with HPMV magnetic ballast and also, suitable for AC direct mains 120-240V operationHigh surge voltage protection: 4kVSuitable for both open and enclosed luminairesWide light distributionHigh switching cycles - 200,000XHigh colour rendering - CRI80Minimum and maximum operating temperature: -30°C to 50°C



PRODUCT OVERVIEW

Product name	ToLEDo Performer T85 4500LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	36
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Logistics & Industry
ETIM Class	EC001959
E-number FI	4740740
Warranty	5 years
Luminous flux (lm)	4500
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Wattage (W)	36
Dimmable	No
Average life (Nominal) (h)	50000
Product EAN number	5410288283715

DATA TABLE

General data

Product name	ToLEDo Performer T85 4500LM 840 E27 SL
Technology	LED
Watt (Rated) (W)	36
Type	LED exchangeable
Cap/Base	E27
Fixture rating	Open
General application	Logistics & Industry
Operating temperature range (°C)	-20°C...+50°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959

ToLEDo Performer T-Series

ToLEDo Performer T85 4500LM 840 E27 SL

0028371

E-number FI	4740740
Warranty	5 years

Optical data

Luminous flux (lm)	4500
Luminous flux (Rated) (lm)	4500
Colour temperature (K)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1
Lumen maintenance at end of nominal life (%)	70

Electrical data

Wattage (W)	36
Starting time (max) (s)	0.5
Warm-up time to 60% of full light (max) (s)	0.5
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.95
Control gear required	No
No. Of switching cycles before premature failures	>200000
Dimmable	No
Inrush Current (A)	80.8
Inrush Duration (µs)	2
Lamp Energy Label (class)	E
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	40

Lifetime data

Lifespan L70 B50	50000
Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

Physical data

Nominal Product Length (mm)	204
Nominal Product Diameter (mm)	85
Weight (kg)	0.646

Packaging

Single packaging type	Carton
Product EAN number	5410288283715
Packaging single length / height (cm)	9.5
Packaging single width (cm)	9.5
Packaging single depth (cm)	25.0
DUN14 (outer)	15410288283712

ToLEDo Performer T-Series

ToLEDo Performer T85 4500LM 840 E27 SL



0028371

Units per outer package	6
Packaging outer length / height (cm)	30.4
Packaging outer width (cm)	20.9
Packaging outer depth (cm)	27.2


Safety data

Optimal operating condition (°C)	-20-50
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures

PHOTOMETRY

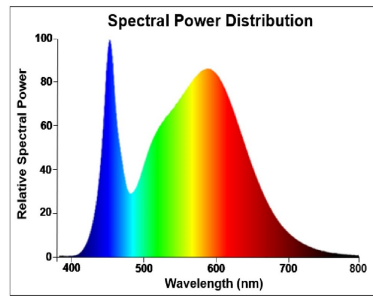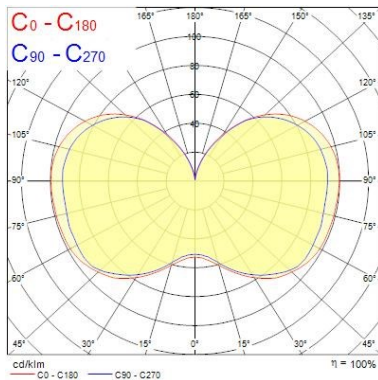

TECHNICAL DRAWINGS




ToLEDo Performer T-Series
ToLEDo Performer T85 4500LM 840 E27 SL
0028371



SYLVANIA

0028371

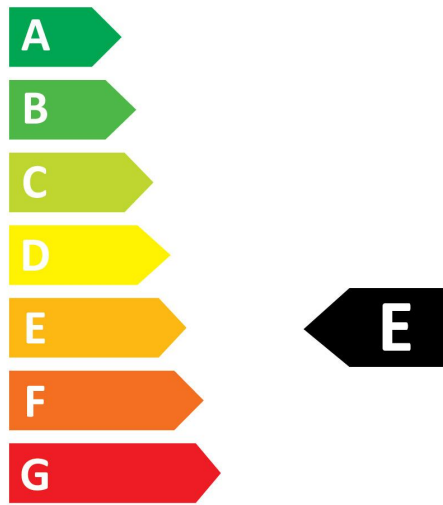

36
kWh/1000h




2019/2015

SYLVANIA

ToLEDo Performer T-Series
ToLEDo Performer T85 4500LM 840 E27 SL
0028371



0028371

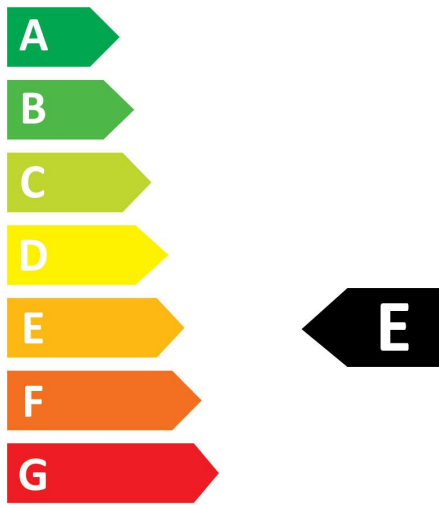

36
kWh/1000h



2019/2015