



### Features


- LED exterior surface mounted luminaire, 1150lm, 12W power consumption, 96lm/W efficacy, 3000K color temperature, CRI80, non-dimmable, IP66, IK10, 90,000 hours (L70B50) Lifespan, black housing, vandal resistant, supplied with anti-theft screws

### Product Overview


<b>Product name</b>	START SURFACE IP66 1150LM 830 IK10 BLK
<b>Technology</b>	LED
<b>Cap/Base</b>	N/A
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling surface mounting, Wall surface mounted
<b>Environment</b>	Indoor, Outdoor
<b>E-number FI</b>	4579597
<b>Fixture luminous flux (lm)</b>	1150
<b>Luminaire efficacy (lm/W)</b>	96
<b>Colour temperature (K)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	5
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	12
<b>Electrical protection</b>	Class II
<b>Control gear type</b>	LED driver constant current
<b>Housing colour</b>	RAL 9011 - Graphite black
<b>IP rating</b>	IP66
<b>IK rating</b>	IK10
<b>Product EAN number</b>	5410288499260
<b>Warranty</b>	5 years

Light your world

## Photometry

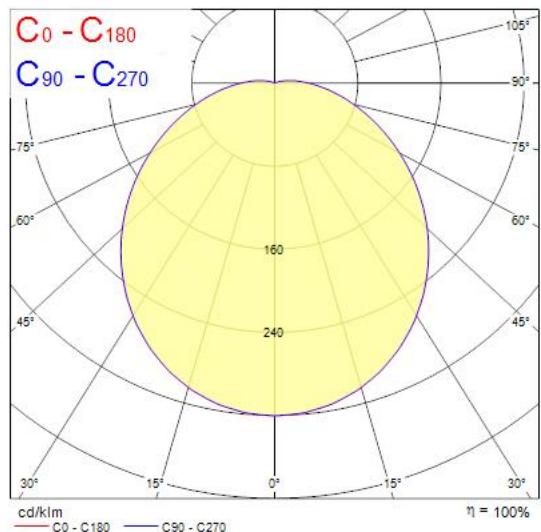

## Technical drawings

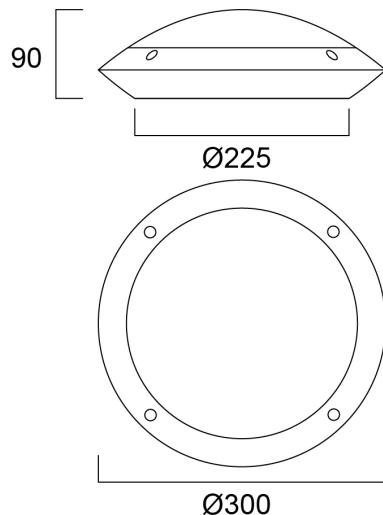

Light your world