

# Optix Recessed Sylvania 600x600 Medium Output

*OPTIX RECESSED 600x600 2L 4000K ALU SSH*  
0044139



## Product features

- OPTIX RECESSED 600x600 2L 4000K ALU SSH is a high efficacy low glare luminaire for office and education applications. Ceiling recessed 600x600 mm. Aluminised plastic extra low glare optics in 2 lines configuration. White RAL9016 fixture body. SylSmart Connected Building capable. 4000K Neutral White LED, CRI>80, chromaticity tolerance of 3-step MacAdam ellipse. Luminous flux 3400lm. Power consumption 27W. Luminaire efficacy 126lm/W. Lifespan: 48,000 hours L90B10. UGR<16, Luminance at 65°<200 Cd/m<sup>2</sup>, IK07, IP20. Photobiological safety risk group 1. Electrical protection Class I. Glow wire test 850°C.




## PRODUCT OVERVIEW

Product name	OPTIX RECESSED 600x600 2L 4000K ALU SSH
Technology	LED (3 SDCM)
Cap/Base	N/A
Housing	Steel
Mount	Ceiling recessed mounting
Fixture rating	Enclosed
General application	Office, Education
ETIM Class	EC002892
E-number FI	4276563
Warranty	5 years
Useful luminous flux (Fuse)	3400
Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	126
Correlated colour temperature (k)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Glare control	< 16
Photobiological Risk Group	RG1
Total power consumption (W)	27
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Dimming method	SylSmart SSH
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288441399

## Optix Recessed Sylvania 600x600 Medium Output

*OPTIX RECESSED 600x600 2L 4000K ALU SSH*  
0044139

### PHOTOMETRY

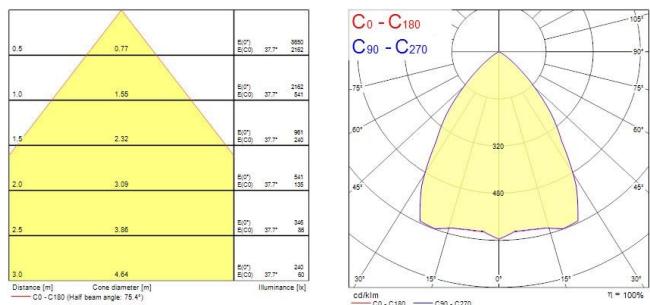

### TECHNICAL DRAWINGS

