

Data Sheet | Item Number: 713-1413/117-000/997-408

THR male header, 2-row; 0.8 x 0.8 mm solder pin; straight; 100% protected against mismatching; in tape-and-reel packaging; Pin spacing 3.5 mm; 26-pole; black


<https://www.wago.com/713-1413/117-000/997-408>





Color: ■ black

Similar to illustration

Similar to illustration

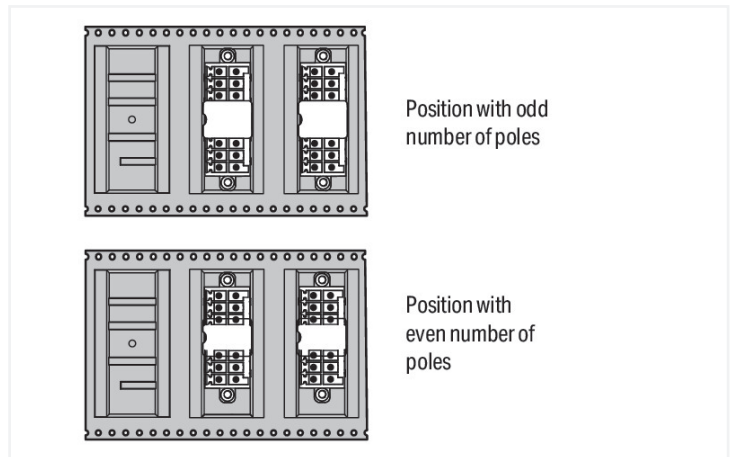

Dimensions in mm
 Pin position in tape-and-reel packaging

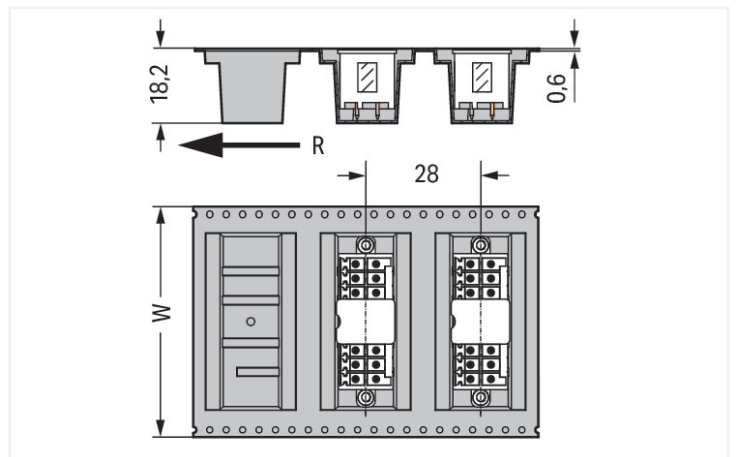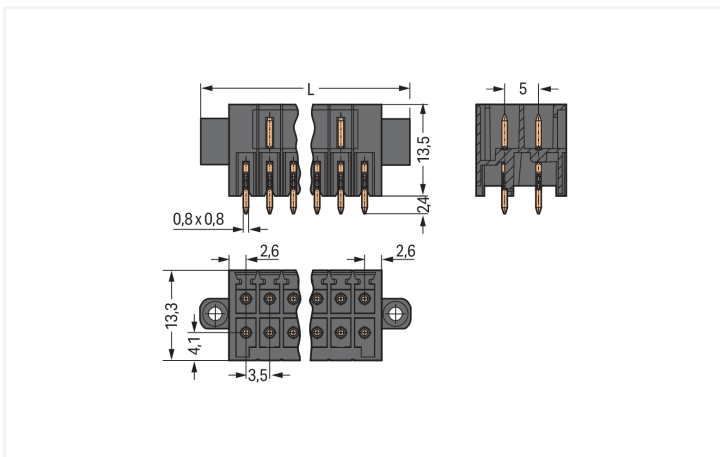

Male connector, 713 Series, black

Enjoy fault-free electrical installations with this male connector (item number 713-1413/117-000/997-408). Dimensions: (55.6 x 15.9 x 13.3) mm (width x height x depth).

Tin is used for coating the contact surfaces. THR is used to assemble the pcb connector.

Notes

Safety Information The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.

Variants: Other pole numbers
Other solder pin lengths
Gold-plated or partially gold-plated contact surfaces
Other versions (or variants) can be requested from WAGO Sales or configured at <https://configurator.wago.com/>.

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	80 V	160 V	250 V
Rated impulse withstand voltage	2.5 kV	2.5 kV	2.5 kV
Rated current	10 A	10 A	10 A

Approvals per	UL 1059		
Use group	B	C	D
Rated voltage	150 V	50 V	-
Rated current	10 A	10 A	-

Approvals per	CSA		
Use group	B	C	D
Rated voltage	150 V	-	-
Rated current	12 A	-	-

Connection Data

Total number of potentials	26
Number of connection types	1
Number of levels	2

Connection 1	
Pole number	26

Physical data

Pin spacing	3.5 mm / 0.138 inches
Width	55.6 mm / 2.189 inches
Height	15.9 mm / 0.626 inches
Height from the surface	13.5 mm / 0.531 inches
Depth	13.3 mm / 0.524 inches
Solder pin length	2.4 mm
Solder pin dimensions	0.8 x 0.8 mm
Plated through-hole diameter (THR)	1.3 (+0.1) mm
Reel diameter of tape-and-reel packaging	330 mm
Tape width	72 mm

Mechanical data

Variable coding	Yes
Anti-rotation protection	Yes

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for PCB
Mismating protection	Yes
Mating direction to the PCB	90 °
Locking of plug-in connection	Threaded flange

PCB contact

PCB contact	THR
Solder pin arrangement	over the entire male connector (in-line)
Number of solder pins per potential	1

Material data

Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material (main housing)	Polyphthalamide (PPA GF)
Flammability class per UL94	V0
Contact material	Electrolytic copper (E _{Cu})
Contact Plating	Tin
Fire load	0 MJ
Weight	7.1 g
MSL per J-STD 020D	1

Environmental requirements

Limit temperature range	-60 ... +100 °C
Processing temperature	-35 ... +60 °C

Commercial data

PU (SPU)	120 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4050821308911
Customs tariff number	85366930000

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-44-04-02
eCl@ss 9.0	27-44-04-02
ETIM 9.0	EC002637
ETIM 10.0	EC002637
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	794c2491-31df-45cc-8f56-aaa2bebf094b
SCIP notification number (Belgium)	c4b122e9-28c9-4e5b-9ab7-72ed12a068f4
SCIP notification number (Bulgaria)	556498c3-3bcc-4f3c-932d-8a0d58f72f51
SCIP notification number (Czech Republic)	214c1ab0-bf6a-4c55-a41d-d8c6ac32111a
SCIP notification number (Denmark)	339da238-1830-422f-89b8-795028225cf8
SCIP notification number (Finland)	5d10cf95-cd04-49bc-aca3-fc39fb5357e4
SCIP notification number (France)	2ee0f422-f486-481d-961e-27e2c754d1e8
SCIP notification number (Germany)	d5ad9458-38e6-4934-ae32-aadb868809f7
SCIP notification number (Hungary)	a450f1e2-dc70-4b7f-8a10-8995d6a148bd
SCIP notification number (Italy)	2836b695-5cb9-4324-abe5-5d9b68e7a36f
SCIP notification number (Netherlands)	06a6494a-a7c2-4057-abad-6533c0e7621c
SCIP notification number (Poland)	9dfabd2d-59b0-475f-b255-09413778825f
SCIP notification number (Romania)	fca049b7-0a56-4da0-9792-e519672e080f
SCIP notification number (Sweden)	ab684dc6-c63f-45ea-938c-0d29d9161b65

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CB DEKRA Certification B.V.	IEC 61984	NL-102427
CSA CSA Group	C22.2	2315087
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-126089

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
Railway WAGO GmbH & Co. KG	-	Z00004424.000

Downloads

Environmental Product Compliance

Compliance Search



Documentation

Additional Information

Technical Section	03.04.2019	pdf 2027.26 KB	
		pdf 535.32 KB	

CAD/CAE-Data

CAD data



PCB Design



1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket

**Item No.: 713-1113/107-000**

1-conductor female connector, 2-row; CA-GE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 26-pole; 100% protected against mismatching; Screw flange; black

1.2 Optional Accessories

1.2.1 Coding


1.2.1.1 Coding

**Item No.: 714-101**

Coding key; orange

Installation Notes

Coding



Coding a male header by inserting a coding pin.