


Twofold faceplate, horizontal 71 mm centre distance, for a double switch and one 45x45 function, Niko Toggle alu grey brushed

155-57807



The Niko Toggle twofold horizontally oriented faceplate clicks onto a double switch and one 45 x 45 mm function that have been horizontally installed next to each other with a centre distance of 71 mm. The faceplate combines with any available Niko Toggle double switch function and a Niko 45 x 45 mm function. It consists of an upper frame, light guide and lower frame that are mechanically interconnected. The upperframe is made of aluminium. The lower frame is made of dark grey polycarbonate (PC) + acrylic-styrene-acrylate (ASA). The upper frame is 6 mm thick and the lower frame 2 mm.

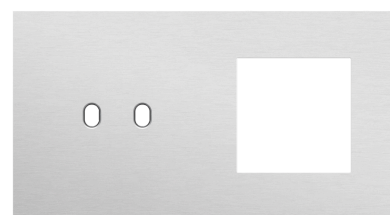

Niko recommends a design combination with a finishing set in the following colour: alu grey for Niko Rocker and Niko Toggle finishing sets and anthracite coated for other finishing sets.

- Exclusive materials
- Authentic vintage design
- Belgian design & craftsmanship
- Design matches Niko Pure portfolio
- Proven Niko quality
- Unique illuminated switch design (by adding feedback LED)
- Designed to fit any available 45 x 45 mm function

Technical data

Twofold faceplate, horizontal 71 mm centre distance, for a double switch and one 45x45 function, Niko Toggle alu grey brushed.

- Double faceplate for two switches.
- Colour faceplate: alu grey brushed
- Colour RAL (approximately): 000 80 00
- Colour NCS (approximately): NCS S 2002-G
- Recommended colour central plate: alu grey for Niko Rocker and Niko Toggle finishing sets and anthracite coated for other finishing sets
- Frame composition: It consists of an upper frame, light guide and lower frame that are mechanically interconnected.
- Material finishing: The upperframe is made of aluminium. The lower frame is made of dark grey polycarbonate (PC) + acrylic-styrene-acrylate (ASA).
- Surface treatment: brushed

- Surface finishing: matt
- Frame thickness: The upper frame is 6 mm thick and the lower frame 2 mm.
- Centre-to-centre distance: 71 mm
- Protection degree: the combination of a mechanism, a central plate and a faceplate has a protection degree of IP20D
- Impact resistance: the combination of a mechanism, a central plate and a faceplate has an impact-resistance of IK06
- Dimensions (HxWxD): 83 mm x 154 mm x 13 mm
- Dimensions visible (HxWxD): 83 mm x 154 mm
- Marking: EU