


Data Sheet | Item Number: 260-404

Test plug module; with locking latches; modular; for 2-conductor terminal blocks;
for 260 Series; gray

<https://www.wago.com/260-404>

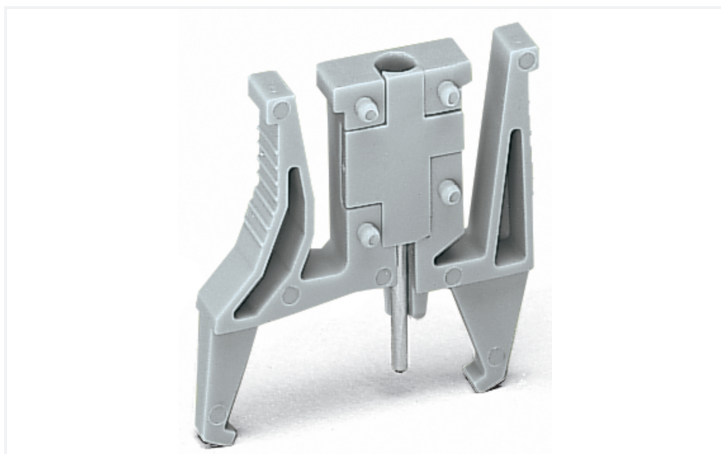

Color: ■ gray

Electrical data

Ratings per IEC/EN

Nominal voltage (III/3)	250 V
-------------------------	-------

Ratings per IEC/EN – Notes

Ratings (note)	Maximum test voltage (touch contact): 48 V (test pins are not touch-proof)
----------------	----------------------------------------------------------------------------

Ratings per IEC/EN 2

Ratings (note)	Maximum test current (touch contact): 0.5 A Maximum test current: 6 A (if the test pins are securely connected in the clamping units)
----------------	------------------------------------------------------------------------------------------------------------------------------------------

General information

Test voltage	48 V
Test current	0.5 A

Physical data

Width	5 mm / 0.197 inches
Height	27.6 mm / 1.087 inches
Depth	29.3 mm / 1.154 inches
Module width	5 mm / 0.197 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.044 MJ
Weight	2.2 g

Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data

Product Group	9 (Std Chassis Mt Blocks)
PU (SPU)	100 (25) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454620660
Customs tariff number	85366990990

Product Classification

UNSPSC	39121402
eCl@ss 10.0	27-14-11-48
eCl@ss 9.0	27-14-11-48
ETIM 9.0	EC002555
ETIM 10.0	EC002555
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	c9606a5e-9a53-42ee-9be0-5bc8430cfefa
SCIP notification number (Belgium)	b4037d88-b1eb-478c-9ecd-6f4d877cd97b
SCIP notification number (Bulgaria)	4e356408-b0c2-47e4-8466-d62449e7bbe7
SCIP notification number (Czech Republic)	a899071b-9856-4b60-9877-97c07dbf4dd6
SCIP notification number (Denmark)	d1f89693-2760-45f0-b7c1-95e4a9c53913
SCIP notification number (Finland)	8a1feb0f-2a3c-495f-8d8b-b39648068954
SCIP notification number (France)	66b08e57-fcb6-49d4-ad70-16663e07ce7a
SCIP notification number (Germany)	7ba26186-5e01-4428-a6d4-f2548e51131e
SCIP notification number (Hungary)	00df818f-bbad-496b-8872-da2767bbb7e5
SCIP notification number (Italy)	f87de3be-85ed-4218-9903-da9dde84c47b
SCIP notification number (Netherlands)	29f7a8e2-fc21-482a-bf56-c83b214079f3
SCIP notification number (Poland)	a3f7c040-00d2-4a63-aec3-6299af05bada
SCIP notification number (Romania)	9ce8fbd6-c3ef-4f72-a253-983044df3c1c
SCIP notification number (Sweden)	2faa4722-7d06-4fba-b880-bea6a759e280

Downloads

Environmental Product Compliance



Compliance Search

Environmental Product
Compliance 260-404



Documentation

Bid Text

260-404	19.02.2019	xml 3.17 KB	
260-404	18.08.2017	doc 24.00 KB	

CAD/CAE-Data

CAE data

WSCAD Universe 260-404	
---------------------------	-----------------------------------------------------------------------------------

1 Compatible Products

1.1 Optional Accessories

1.1.1 Test and measurement


1.1.1.1 Testing accessories



Item No.: 210-136

Test plug; 2 mm Ø; with 500 mm cable; red

Installation Notes



Testing via test plug modules snapped onto a terminal strip – wired or unwired. As touch contact is made with the CAGE CLAMP® (spring steel) unit, this testing type is limited to maximum 0.5 A.

Distance between locking devices must be approximately 35 ... 40 mm!



Testing after the conductors have been terminated.