


Start Surface Wall Cube

START Surface Wall Cube IP54 2x140lm 2CCT White
0047137



Product features

- Exterior adjustable surface wall up and down light luminaire, RAL9016 - Traffic White colour, 280lm, 5.8W, 48lm/W, 3000/4000K switchable CCT, adjustable beam angle (0 - 94°), 104.000 hrs L70:B50 lifespan, CRI 80, SDCM<3, IP54, IK05, 1000 hrs salt spray test, -20 - +45°C operating temperature range, 108x108x108mm, Class I

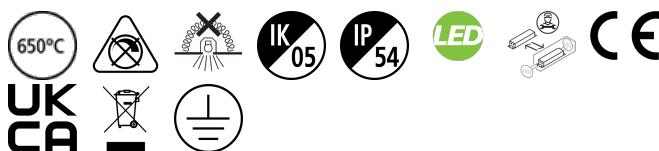


PRODUCT OVERVIEW

Product name	START Surface Wall Cube IP54 2x140lm 2CCT White
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Wall surface mounted
General application	Residential & Consumer
ETIM Class	EC002892
E-number FI	4579606
Warranty	5 years
Fixture luminous flux (lm)	280
Luminaire efficacy (lm/W)	48
Light colour	Warm White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Total power consumption (W)	5.8
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Dimming method	N/A
Housing colour	White
IP rating	IP54
IK rating	IK05
Product EAN number	5410288471372

PHOTOMETRY

Start Surface Wall Cube

START Surface Wall Cube IP54 2x140lm 2CCT White
0047137



TECHNICAL DRAWINGS

