


Data Sheet | Item Number: 261-404

Test plug module; with locking latches; modular; for 2-conductor terminal blocks;
for 261 Series; gray

<https://www.wago.com/261-404>

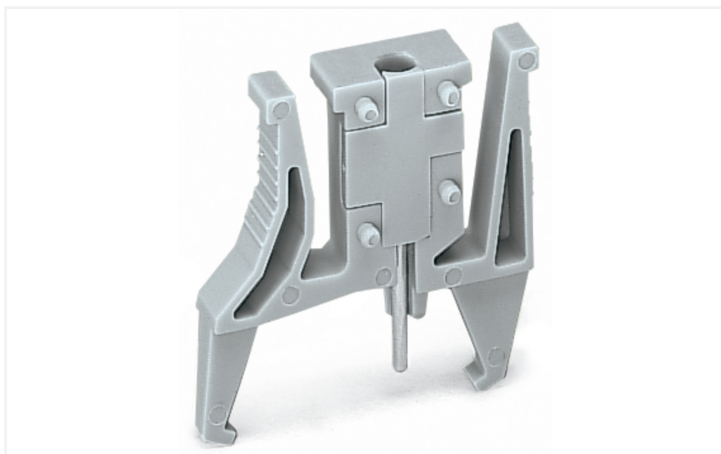

Color: ■ gray

Electrical data

Ratings per IEC/EN

Nominal voltage (III/3)	400 V
-------------------------	-------

Ratings per IEC/EN – Notes

Ratings (note)	Maximum test voltage (touch contact): 48 V (test pins are not touch-proof)
----------------	--

Ratings per IEC/EN 2

Ratings (note)	Maximum test current (touch contact): 0.5 A Maximum test current: 6 A (if the test pins are securely connected in the clamping units)
----------------	--

General information

Test voltage	48 V
Test current	0.5 A

Physical data

Width	6 mm / 0.236 inches
Module width	6 mm / 0.236 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	gray
Material group	I
Insulation material (main housing)	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.053 MJ
Weight	2.3 g

Environmental requirements

Processing temperature	-35 ... +85 °C
Continuous operating temperature	-60 ... +105 °C

Commercial data

Product Group	9 (Std Chassis Mt Blocks)
PU (SPU)	100 (25) pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821868958
Customs tariff number	85366990990

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-14-11-48
eCl@ss 9.0	27-14-11-48
ETIM 9.0	EC002555
ETIM 10.0	EC002555
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c)
SCIP notification number (Austria)	277569a6-3c62-4aec-8c84-4fea3b95a98a
SCIP notification number (Belgium)	efdf1afd-c9a4-4b52-aff-d02a297a159a
SCIP notification number (Bulgaria)	af199999-a42a-4f9e-847a-016583a6ec7f
SCIP notification number (Czech Republic)	50337d2f-173c-4c86-8829-b7f708954a23
SCIP notification number (Denmark)	ed7d0ee4-53fe-4eb0-a8c1-543eec585f4b
SCIP notification number (Finland)	0fd93198-e575-40cb-b00c-3509f13ac289
SCIP notification number (France)	52c91b9f-6bea-4555-b7a7-b2046c73a39b
SCIP notification number (Germany)	bbf442ee-f8c9-4b37-8168-a3368ab10bb9
SCIP notification number (Hungary)	acf80076-75ec-4bc7-82de-101b5f770197
SCIP notification number (Italy)	a2374a79-a9c7-40e2-96c8-cd50f97c0ca8
SCIP notification number (Netherlands)	926eb167-a5c6-4217-81f3-34d38a3441ae
SCIP notification number (Poland)	364f524c-7bd0-4ede-83eb-8af74da088c9
SCIP notification number (Romania)	ba195b19-5c4f-4cad-be28-21f54f437a87
SCIP notification number (Sweden)	25ed6de5-fa7d-4136-a45f-e68e4bfbb26

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 261-404



Documentation

Bid Text

261-404	19.02.2019	xml 3.17 KB	↓
261-404	18.08.2017	doc 24.50 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models 261-404



CAE data

WSCAD Universe
261-404



ZUKEN Portal 261-404



1 Compatible Products

1.1 Optional Accessories

1.1.1 Test and measurement


1.1.1.1 Testing accessories



Item No.: 210-136


Test plug; 2 mm Ø; with 500 mm cable; red

Installation Notes



Testing via test plug modules snapped onto a terminal strip – wired or unwired. As touch contact is made with the CAGE CLAMP® (spring steel) unit, this testing type is limited to maximum 0.5 A.

Distance between locking devices must be approximately 35 ... 40 mm!



Testing after the conductors have been terminated.