

27 805 625 Product version from 6/30/2015 to 6/3/2020



- COMPACT RAIN, max. flow rate 15 l/min (at 3 bar)
- spray head Ø 100mm
- three settings: normal flow, soft flow, massage flow
- with anti-scale system
- metal shower hose 1250mm with integrated anti-twist protection
- shower holder rosette Ø 55mm

Intrinsic protection against back flow.

Recommended miscellaneous



- Concealed wall elbow -**
- min. recess depth 90 mm
 - max. recess depth 163 mm

35 085 970 90


Recommended miscellaneous



- Wall elbow - Brushed Durabron (23kt Gold)** 28 450 625-28

27 805 625 Product version from 6/30/2015 to 6/3/2020

mm [inches]

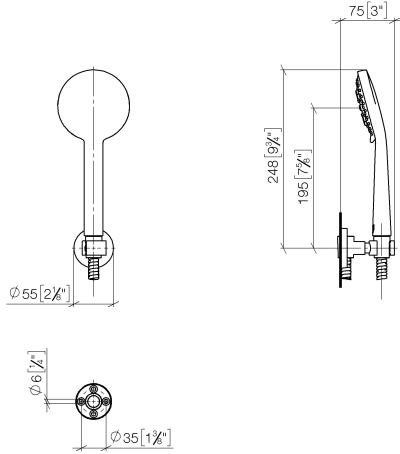

Flow rate chart



Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Hand shower set - Brushed Durabronze (23kt Gold)

SERIES SPECIFIC

27 805 625 Product version from 6/30/2015 to 6/3/2020


Certificates and sustainability

LGA_29

LGA_29

WRAS_2304

27 805 625 Product version from 6/30/2015 to 6/3/2020

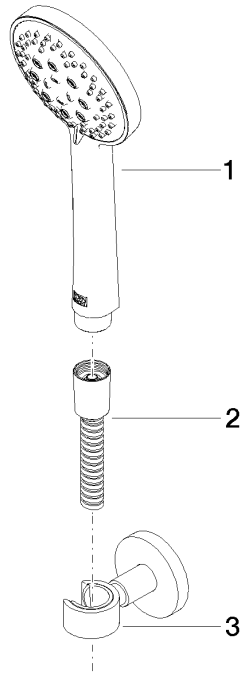

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|--|---------------|---------------|
| 1 | 90 12 11 173 00-28 | Hand shower 15 l/min. - Brushed Durabron (23kt Gold) | 1.00 | 40 |
| 3 | 28 050 625-28 | Wall bracket - Brushed Durabron (23kt Gold) | 1.00 | 40 |
| 2 | 90 30 02 072 00-28 | Metal shower hose 1/2" x 3/8" x 1250 mm - Brushed Durabron (23kt Gold) | 1.00 | 40 |